



- 操作距离大
- Easy operation
- Two digital LED displays for threshold value and actual value
- Teach-in / manual fine adjustment
- Timer function / offset-function
- 亮通/暗通, 可切换

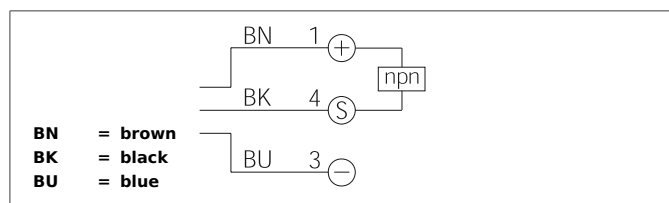

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.
These instruments shall exclusively be used by qualified personnel.

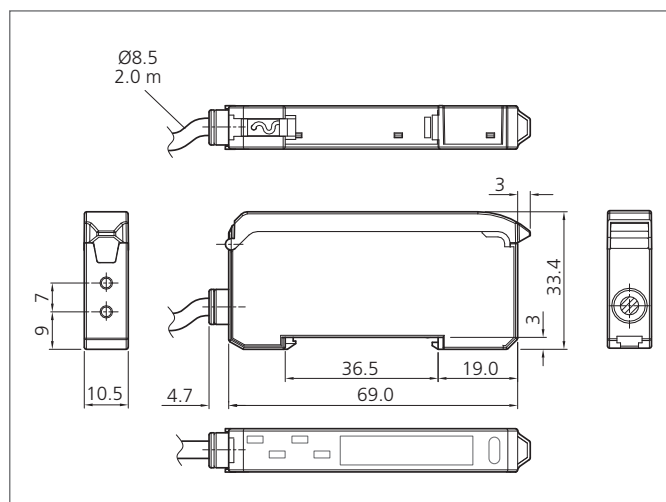

TECHNICAL INFORMATION (typ.)

	+20°C, 24V DC
放大器	Plastic fiber optics 2x2,2 mm
评估	数字的
发射光	红色光, 625 nm
工作电压	12 ... 24 V DC $\pm$ 10%
内部功耗	40 mA
控制按钮	4
灵敏度调节	示教键
开关输出	npn, 100 mA, NO/NC, 可编程的
负载振荡	10 ... 55 Hz / 1,0 mm / 30 g
显示	数字LED显示
工作频率	1,0 / 0,8 / 0,6 / 0,4 / 0,2 kHz
反应时间/释放时间	0,25 / 0,31 / 0,42 / 0,63 / 1,25 ms
反应时间	0,25 / 0,31 / 0,42 / 0,63 / 1,25 ms
环境温度	-10 ... +55 °C
环境光免疫	10 kLx
绝缘电压	1.000 V
防护等级	IP 54
防护等级	III, 在保护性低电压下工作
外壳材料	ABS / PC
连接	Cable, 2,0 m