
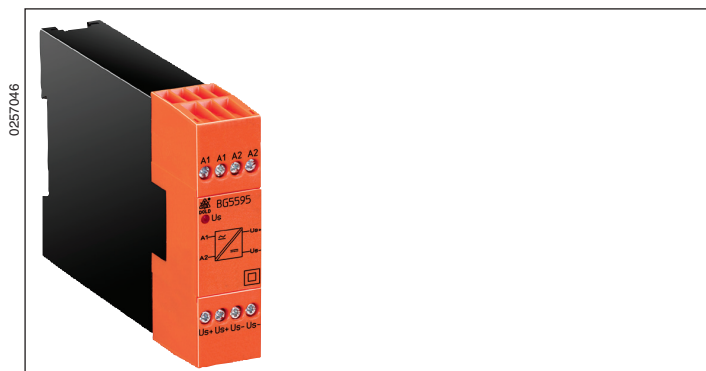


Switched Power Supply
BG 5595

- According to IEC/EN 60 950
- Protection class II acc. to EN 61 558-1
- Secondary voltage DC 24 V up to 1 A
- Short circuit and overload protection
- Width 22.5 mm

Circuit Diagram



Connection Terminals

Terminal designation	Signal designation
A1, A2	Auxiliary voltage AC or DC
Us+, Us-	Secondary voltage DC 24 V

Approvals and Markings



Application

For supplying 24 V DC voltage.

Function

The switched power supply unit provides an regulated DC voltage of 24 V on the output. Due to the operating principle an efficiency of approx. 85 % the power dissipation is cut down to a minimum.

Indicator

LED green: on when secondary voltage connected

Technical Data

Primary voltage:	AC/DC 110 ... 230 V The output voltage is available on 2 pairs of terminals (A1 and A2) These are connected internally in parallel.
Voltage range	
AC:	70 ... 265 V
DC:	85 ... 300 V
Primary current at nominal voltage U_N:	
no-load operation	
at AC 230 V:	20 mA
at DC 230 V:	7 mA
at AC 110 V:	16 mA
at DC 110 V:	10 mA
Efficiency:	approx. 85 %
Secondary voltage:	DC 24 V $\pm$ 10 % The output voltage is available on 2 pairs of terminals. (U_{S+} and U_{S-}) These are connected internally in parallel.
Secondary current:	continuously, device mounted without distances heated by devices with same load: 0.5 A at ambient temperature 45 °C continuously, device mounted with 10 mm spacing: 1 A at ambient temperature 45 °C short time 1 min: 1,3 A at AC 110 V; 1,6 A at AC 230 V
Residual ripple at max. load:	$\leq$ 1 %
Current limitation:	electronic short circuit protection and overload protection. Disconnection of 1,3 A at AC 110 V and 1,6 A at AC 230 V.

Technical Data

General Data

Operating mode:	Continuous operation	
Temperature range		
Operation:	- 20 ... + 45 °C	
Storage:	- 25 ... + 70 °C	
Altitude:	< 2,000 m	
Clearance and creepage distances		
overvoltage category /		
contamination level:	6 kV / 2	IEC 60 664-1
EMC		
Electrostatic discharge:	8 kV (air)	IEC/EN 61 000-4-2
HF-irradiation:	10 V / m	IEC/EN 61 000-4-3
Fast transients:	4 kV	IEC/EN 61 000-4-4
Surge voltages		
between		
wires for power supply:	2 kV	IEC/EN 61 000-4-5
HF-wire guided:	10 V	IEC/EN 61 000-4-6
Interference suppression:	Limit value class B	EN 55 011
Degree of protection:		
Housing:	IP 40	IEC/EN 60 529
Terminals:	IP 20	IEC/EN 60 529
Enclosure:	Thermoplastic with V0 behaviour according to UL subject 94	
Vibration resistance:	Amplitude 0.35 mm frequency 10 ... 55 Hz IEC/EN 60 068-2-6	
Climate resistance:	20 / 045 / 04 IEC/EN 60 068-1	
Terminal designation:	EN 50 005	
Wire connection:	1 x 2,5 mm ² stranded wire with sleeve or 1 x 4 mm ² solid or 2 x 1,5 mm ² stranded wire with sleeve DIN 46 228-1/-2/-3/-4	
Insulation of wires or sleeve length:	10 mm	
Wire fixing:	Plus-minus terminal screws M3.5 box terminals with wire protection	
Fixing torque:	0.8 Nm	
Mounting:	DIN rail	IEC/EN 60 715
Weight:	200 g	

Dimensions

Width x height x depth: 22.5 x 84 x 121 mm

Standard Type

BG 5595	AC/DC 110 ... 230 V	50 / 60 Hz
Article number:	0055045	
• Secondary voltage:	DC 24 V	
• Primary nominal voltage U _N :	AC/DC 110 ... 230 V	
• Width:	22.5 mm	

Ordering Example

BG 5595 _ _ _ 50 / 60 Hz

