



Field-wireable connector , M12x1, Soldering contact

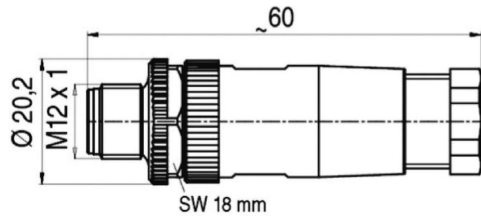


Product data

Item description	WASC 12L
Item-No.	8031860
Customs tariff-No.	85366990
Step-File	WASC 12L.stp
EAN	4047106000578

Technical data

Connector	male, straight, M12x1
Number of pins	12
Coding	A
Rated voltage	30V
Current load (at 40°C)	2A
Insulation resistance	$\geq 10^9 \Omega$
Resistance	$\leq 3 m\Omega$
Ambient temperature product	-40°C...+85°C
Contact material	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, PA, BK
Grip body material	Plastic, PA, BK
Coupling nut material	Metal, GD-ZN, nickel-plated
Connecting cross-section	max. 0.25 mm ²
Cable outlet	6...8 mm
Connecting type	Soldering contact
Standards	IEC 61076-2-101
Degree of protection (mounted)	IP67
Mechanical life-cycle	>100 mating cycles
Degree of pollution	3

Manual

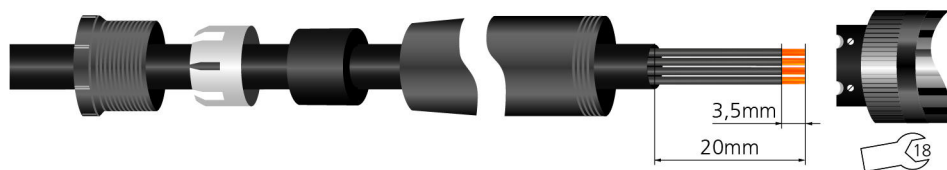

Classification

eCl@ss 6.0	27260702
eCl@ss 7.0	27440102
eCl@ss 8.0	27440102
eCl@ss 9.0	27440102
ETIM 5.0	EC002635
ETIM 6.0	EC002635