


Single-ended cordset, Automation Line, Ø8mm snap

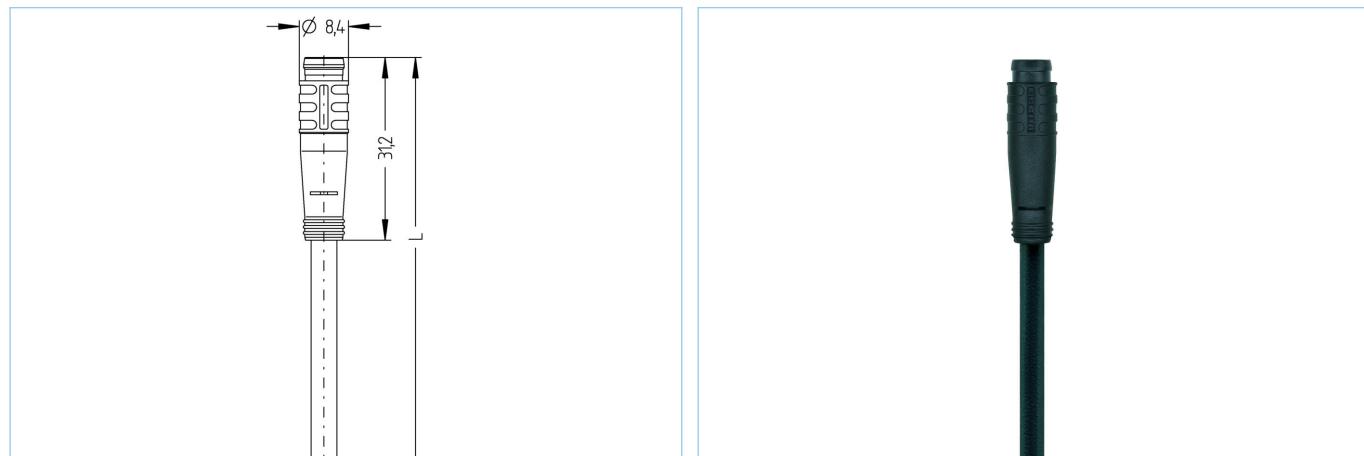

**Product data**

Item description AL-SP4.5-5/S370

Item-No. 8050014

Length 5m

Customs tariff-No. 85444290

Step-File AL-SP4\_5.stp

EAN 4047106009526

**Technical data**

Connector male, straight, Ø8mm snap

Number of pins 5

Pin assignment 1 BN, 2 WH, 3 BU, 4 BK, 5 GY

Rated voltage 30V

Current load (at 40°C) 3A

Insulation resistance  $\geq 10\Omega$

Resistance  $\leq 5\text{m}\Omega$

Ambient temperature product  $-30^\circ\text{C}...+90^\circ\text{C}$

Contact material Metal, CuSn, gold-plated

Contact-carrier material Plastic, TPU, BK

Grip body material Plastic, TPU, BK

Standards IEC 61076-2-104

Degree of protection (mounted) IP65, IP67, IP68

Mechanical life-cycle >100 mating cycles

Cable end assembly open cable end

Degree of pollution 3

**Cable**

**PUR, UL, S370**

Flexible, silicone- and halogen-free control line with high mechanical strength. The cable is chemicals, hydrolysis-, and microbes- resistant. The drag-chain application is possible at a bending radius of minimum 10 x d. Due to its weld-field immunity, the cable is very well suited for the flexible application in robotics, machine-tool, and metal-cutting production. The cables meet the UL and CSA (UL10493/20549; cULus) requirements.

Outer diameter of jacket	4,70 mm
Cable-jacket material	PUR
Jacket color	BK, similar RAL9005
Wire cross-section	5 x 0.25 mm <sup>2</sup>
Wire insulation material	PP
Wire colors	BN, WH, BU, BK, GY
Conductor structure	32 x 0.10 mm
Bending radius (fixed)	5 x Ø-cable
Bending radius (repeated)	10 x Ø-cable
Temperature range (repeated)	-30°C...+90°C
Temperature range (fixed)	-50°C...+90°C
Temperature range (drag chain)	-25°C...+60°C
Drag chain-application	2 Mio. cycles
Halogen-free	Yes
Torsion	+/-180°/m, ≥ 1 Mio. cycles
Rated voltage cable	≤300 V
Special features	flame retardant, seawater resistant, recyclable, LABS free, RoHs compliant, acid- and alkali resistant, ozone resistant, UV resistant, hydrolysis proof, drag chain-adapted, torsion resistant, welding sparks resistant, halogen free, silicone free, oil resistant

**Classification**

eCl@ss 6.0	27279218
eCl@ss 7.0	27279218
eCl@ss 8.0	27279218
eCl@ss 9.0	27060311
ETIM 5.0	EC001855
ETIM 6.0	EC001855

**Accessories**

**Mounting-set, M8**

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8047663/Mounting-set-M8-clips-and-screws-M4x8-black>

**Torque-wrench set**

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8055431/Torque-wrench-set-M8-M12>

**Marking rings Ø 9mm**

<https://www.escha.net/en/products/standard/accessories-for-connectivity/?p=1&o=3&n=15&f=809>

**Cable Stripping Tool**

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8066215/Cable-stripping-tool-4.40-7.00mm-outer-diameter>

**Cable Stripping Tool**

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8066216/Cable-stripping-tool-3.20-4.40mm-outer-diameter>