
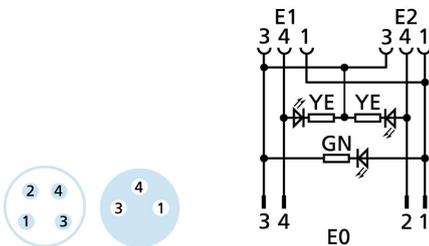


Y-splitter, M8, MB

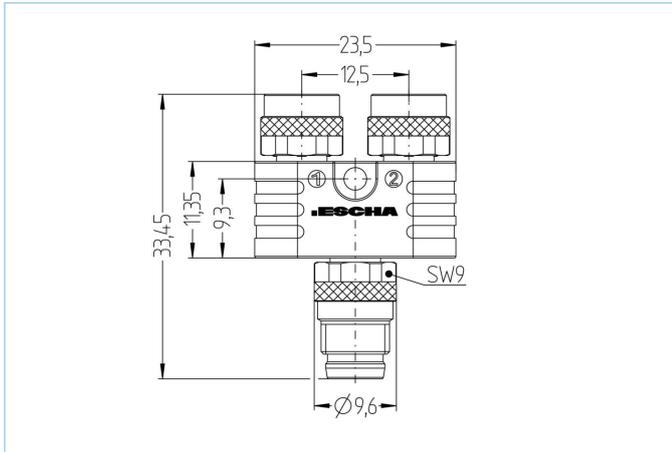

Product data

| | |
|--------------------|---------------------|
| Item description | MB-SSP4-2SKP3P3/S56 |
| Item-No. | 8052223 |
| Customs tariff-No. | 85366990 |
| Step-File | MB-SSP4-2SKP3P3.stp |
| EAN | 4047106115913 |

| | Exit 0 | Exit 1 | Exit 2 |
|--------------------------|----------------------------|----------------------------|----------------------------|
| Connector | male, M8, with LED | female, M8, with LED | female, M8, with LED |
| Contact material | Metal, CuZn, gold-plated | Metal, CuZn, gold-plated | Metal, CuZn, gold-plated |
| Contact-carrier material | Plastic, TPU, BK | Plastic, TPU, BK | Plastic, TPU, BK |
| Coupling nut material | Metal, CuZn, nickel-plated | Metal, CuZn, nickel-plated | Metal, CuZn, nickel-plated |
| Rated voltage | 30V | 30V | 30V |
| Number of pins | 4 | 3 | 3 |
| Current load (at 40°C) | 4A | 4A | 4A |

| | |
|--------------------------------|---------------------------|
| Insulation resistance | $\geq 10^9 \Omega$ |
| Ambient temperature product | -30°C...+90°C |
| Operating voltage-indicator | LED GN |
| Signal status-indicator | LED YE/YE |
| Grip body material | Plastic, TPU, transparent |
| Sealing (female) material | FPM/FKM |
| Mechanical life-cycle | >100 mating cycles |
| Standards | IEC 61076-2-104 |
| Degree of protection (mounted) | IP65, IP67, IP68 |
| Degree of pollution | 3/2 |

Classification

| | |
|------------|----------|
| eCl@ss 6.0 | 27279201 |
| eCl@ss 7.0 | 27279201 |
| eCl@ss 8.0 | 27279201 |
| eCl@ss 9.0 | 27440106 |
| ETIM 5.0 | EC002062 |
| ETIM 6.0 | EC002925 |