


## Single-ended cordset, Automation Line, M8, shielded

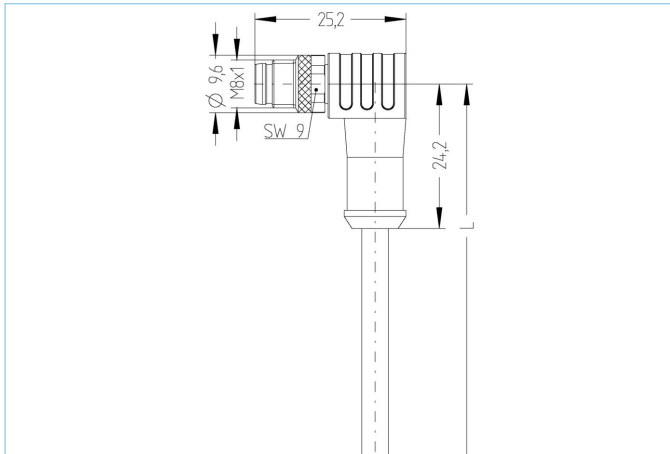

### Product data

|                    |                     |
|--------------------|---------------------|
| Item description   | AL-SWSPS4.5-10/S370 |
| Item-No.           | 8050061             |
| Length             | 10m                 |
| Customs tariff-No. | 85444290            |
| Step-File          | AL-SWSPS4_5.stp     |
| EAN                | 4047106009885       |

### Technical data

|                                |                              |
|--------------------------------|------------------------------|
| Connector                      | male, angled, M8             |
| Number of pins                 | 5                            |
| Pin assignment                 | 1 BN, 2 WH, 3 BU, 4 BK, 5 GY |
| Rated voltage                  | 30V                          |
| Current load (at 40°C)         | 3A                           |
| Insulation resistance          | $\geq 10^9 \Omega$           |
| Resistance                     | $\leq 5 m\Omega$             |
| Ambient temperature product    | -30°C...+90°C                |
| Contact material               | Metal, CuSn, gold-plated     |
| Contact-carrier material       | Plastic, TPU, BK             |
| Grip body material             | Plastic, TPU, BK             |
| Coupling nut material          | Metal, CuZn, nickel-plated   |
| Shielding                      | with shielding               |
| Standards                      | IEC 61076-2-104              |
| Degree of protection (mounted) | IP65, IP67, IP68             |
| Mechanical life-cycle          | >100 mating cycles           |
| Cable end assembly             | open cable end               |
| Degree of pollution            | 3                            |

## Cable PUR, UL, S370

Flexible, silicone- and halogen-free control cable with high mechanical strength. The cable is chemicals, hydrolysis-, and microbesresistant. The drag-chain application is possible at a bending radius of minimum  $10 \times d$ . Due to its weld-field immunity, the cable is very well suited for the flexible application in robotics, machine-tool, and metal-cutting production. The cables meet the UL and CSA (UL10493/20549; cULus) requirements. Very good EMC-features with shielded versions.

|                                |                                                                                                                                                                                                                                                                      |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Outer diameter of jacket       | 5,60 mm                                                                                                                                                                                                                                                              |
| Cable-jacket material          | PUR                                                                                                                                                                                                                                                                  |
| Jacket color                   | BK, similar RAL9005                                                                                                                                                                                                                                                  |
| Wire cross-section             | 5 x 0.25 mm <sup>2</sup>                                                                                                                                                                                                                                             |
| Wire insulation material       | PP                                                                                                                                                                                                                                                                   |
| Wire colors                    | BN, WH, BU, BK, GY                                                                                                                                                                                                                                                   |
| Conductor structure            | 32 x 0.10 mm                                                                                                                                                                                                                                                         |
| Bending radius (fixed)         | 5 x Ø-cable                                                                                                                                                                                                                                                          |
| Bending radius (repeated)      | 12 x Ø-cable                                                                                                                                                                                                                                                         |
| Temperature range (repeated)   | -30°C...+90°C                                                                                                                                                                                                                                                        |
| Temperature range (fixed)      | -40°C...+90°C                                                                                                                                                                                                                                                        |
| Temperature range (drag chain) | -25°C...+60°C                                                                                                                                                                                                                                                        |
| Drag chain-application         | 1 Mio. cycles                                                                                                                                                                                                                                                        |
| Shielding                      | Yes                                                                                                                                                                                                                                                                  |
| Halogen-free                   | Yes                                                                                                                                                                                                                                                                  |
| Rated voltage cable            | ≤300 V                                                                                                                                                                                                                                                               |
| Special features               | flame retardant, seawater resistant, recyclable, LABS free, RoHs compliant, acid- and alkali resistant, ozone resistant, UV resistant, hydrolysis proof, drag chain-adapted, torsion resistant, welding sparks resistant, halogen free, silicone free, oil resistant |

## Classification

|            |          |
|------------|----------|
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |
| ETIM 5.0   | EC001855 |
| ETIM 6.0   | EC001855 |

## Accessories

### Mounting-set, M8

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8047663/Mounting-set-M8-clips-and-screws-M4x8-black>

### Torque-wrench set

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8055431/Torque-wrench-set-M8-M12>

### Marking rings Ø 9mm

<https://www.escha.net/en/products/standard/accessories-for-connectivity/?p=1&o=3&n=15&f=809>

### Cable Stripping Tool

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8066215/Cable-stripping-tool-4.40-7.00mm-outer-diameter>

### Cable Stripping Tool

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8066216/Cable-stripping-tool-3.20-4.40mm-outer-diameter>