
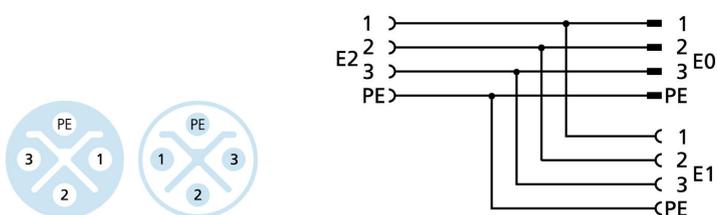


h-splitter, POWER, M12

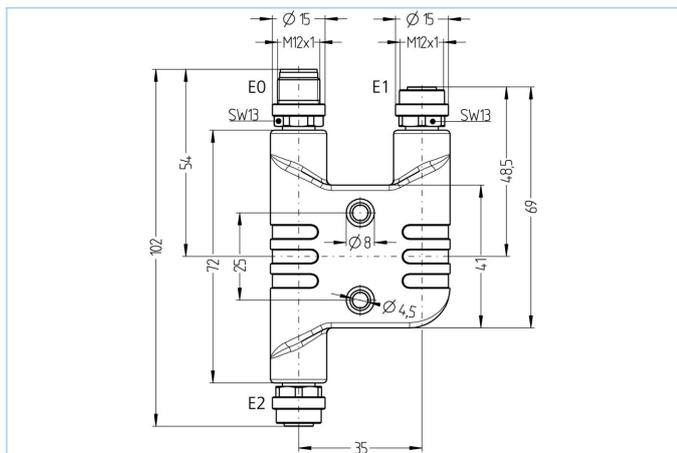


Product data

Item description	PS-3HM12-S4-2K4
Item-No.	8062859
Customs tariff-No.	85366990
Step-File	PS-3HM12-S4-2K4.stp
EAN	4047106149086

	Exit 0	Exit 1	Exit 2
Connector	male, M12	female, M12	female, M12
Contact material	Metal, CuZn, gold-plated	Metal, CuZn, gold-plated	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, PA, BK	Plastic, PA, BK	Plastic, PA, BK
Coupling nut material	Metal, CuZn, nickel-plated	Metal, CuZn, nickel-plated	Metal, CuZn, nickel-plated
Rated voltage	630V _{AC} 600V _{AC} (UL)	630V _{AC} 600V _{AC} (UL)	630V _{AC} 600V _{AC} (UL)
Coding of	S	S	S
Number of pins	3+PE	3+PE	3+PE
Current load (at 40°C)	12A	12A	12A

Insulation resistance	≥10 ⁹ Ω
Ambient temperature product	-30°C...+90°C
Grip body material	Plastic, TPU, BK
Sealing (female) material	FPM/FKM
Mechanical life-cycle	>100 mating cycles
Standards	IEC 61076-2-111
Degree of protection (mounted)	IP65, IP67, IP68
Degree of pollution	2

Derating curve according to DIN 60512-5-2

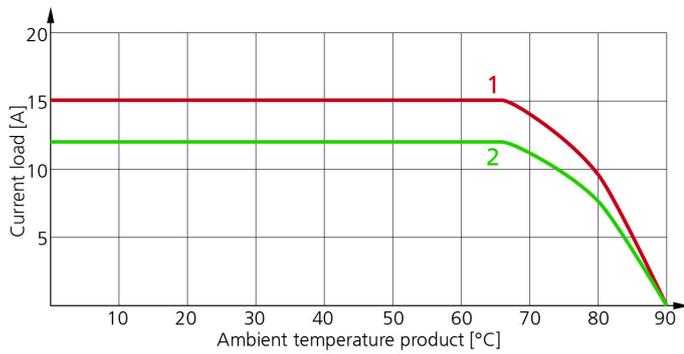

1: Base curve

2: Derived curve according to DIN 60512-5-2 with correction factor 0,8

UL installation note

https://www.escha.net/media/pdf/ESCHA_Kundeninformation_M12x1_POWER_UL_2018.pdf

Classification

eCl@ss 6.0	27279201
eCl@ss 7.0	27279201
eCl@ss 8.0	27279201
eCl@ss 9.0	27440106
ETIM 5.0	EC002062
ETIM 6.0	EC002925