
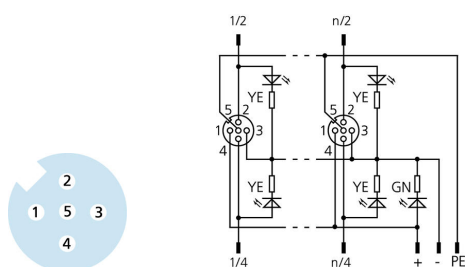
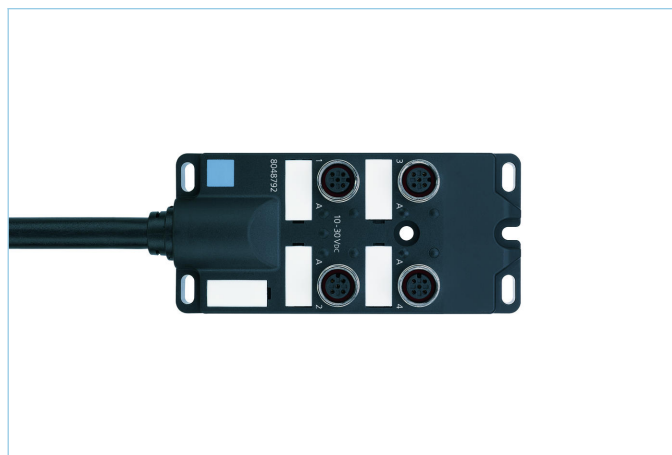


I/O-junction passive, M12, Cable

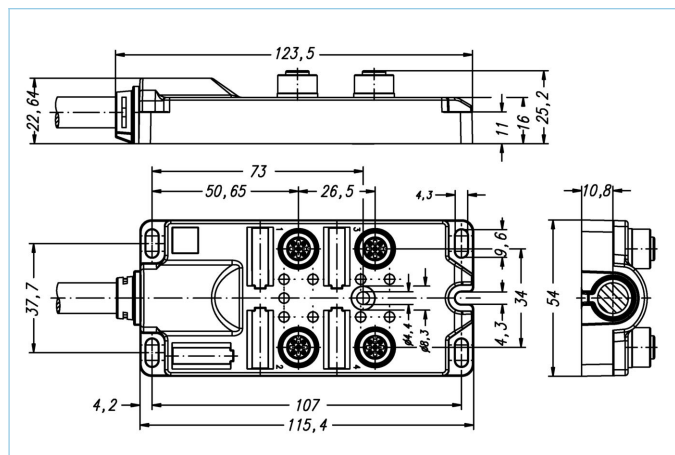

Product data

Item description	4I/OM12-5P3C-2/S370
Item-No.	8045894
Length	2m
Customs tariff-No.	85444290
Step-File	4IOM12-5P3C.stp
EAN	4047106004477

Technical data		
I/O-junction		4-way, with cable
I/O-slot		female, M12
Number of pins		4+PE
Coding		A
Rated voltage		30V
Current load (at 40°C)		2A
Total current load		12A
Insulation resistance		≥10 ⁹ Ω
Resistance		≤ 5mΩ
Ambient temperature product		-30°C...+90°C
Number of LEDs		9
Number of I/O-slots		4
Circuit logic		pnp
Signal status-indicator		LED YE
Operating voltage-indicator		LED GN
Contact material		Metal, CuZn, gold-plated
Contact-carrier material		Plastic, PA, BK
Sealing (female) material		FPM/FKM
Housing material		Plastic, PA, BK
Connecting type		Fixed cable connection
Thread insert material		Metal, CuZn
Standards		IEC 61076-2-101
Degree of protection (mounted)		IP65, IP67
Mechanical life-cycle		>100 mating cycles
Degree of pollution		3

Cable PUR, UL, S370

Flexible, silicone- and halogen-free control line with high mechanical strength. The cable is chemicals, hydrolysis-, and microbes- resistant. The drag-chain application is possible at a bending radius of minimum 10 x d. Due to its weld-field immunity, the cable is very well suited for the flexible application in robotics, machine-tool, and metal-cutting production. The cables meet the UL and CSA (UL10493/20549; cULus) requirements.

Outer diameter of jacket	8,2 +/- 0,3 mm
Cable-jacket material	PUR
Jacket color	BK, similar RAL9005
Wire cross-section	8 x 0.34 mm ² + 3 x 1 mm ²
Wire insulation material	PP
Wire colors	GY, RDBU, GN, GYPK, WHGN, BNGN, WH, BU, GNYE, BN
Bending radius (fixed)	5 x Ø-cable
Bending radius (repeated)	10 x Ø-cable
Temperature range (repeated)	-30°C...+90°C
Temperature range (fixed)	-50°C...+90°C
Temperature range (drag chain)	-25°C...+60°C
Drag chain-application	2 Mio. cycles
Halogen-free	Yes
Rated voltage cable	≤300 V
Special features	flame retardant, seawater resistant, recyclable, LABS free, RoHs compliant, acid- and alkali resistant, ozone resistant, UV resistant, hydrolysis proof, drag chain-adapted, torsion resistant, welding sparks resistant, halogen free, silicone free, oil resistant

Allocation chart

I/O	1		2		3		4		all (+)	all (-)	all (FE)
Pin	2	4	2	4	2	4	2	4	1	3	5
Cable	GYPK	WH	RDBU	GN	WHGN	YE	BNGN	GY	BN	BU	GNYE

Classification

eCl@ss 6.0	27279219
eCl@ss 7.0	27279219
eCl@ss 8.0	27279219
eCl@ss 9.0	27440108
ETIM 5.0	EC002585
ETIM 6.0	EC002585

Accessories

Screw plug, M12

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8000004/Screw-plug-M12-female-black>

Labels, I/O-junction passive, I/O-junction logic

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8015002/Labels-M12-I/O-junctions>

Accessories set, I/O-junction logic, M8

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8087215/Accessory-set-M12-I/O-junctions-labels-screw-plug>