


Double-ended cordset, 100 MBit/s, Industrial Ethernet, RJ45 light, shielded

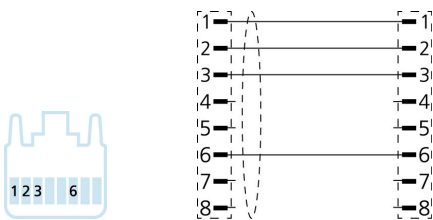

| Product data | |
|--------------------|---|
| Item description | IE-RJ45SLS8.005-5-IE-RJ45SLS8.005/S3400 |
| Item-No. | 8075806 |
| Length | 5m |
| Customs tariff-No. | 85444290 |
| Step-File | IE-RJ45SLS8-m-IE-RJ45SLS8.stp |
| EAN | 4047106167035 |
| Label-carrier | 2 pieces |

| Technical data | A-side | B-side |
|--------------------------------|----------------------------|----------------------------|
| Connector | male, straight, RJ45 light | male, straight, RJ45 light |
| Number of pins | 4 | 4 |
| Pin assignment | 1 WHOG, 2 OG, 3 WHBU, 6 BU | 1 WHOG, 2 OG, 3 WHBU, 6 BU |
| Allocation | Industrial | Industrial |
| Rated voltage | 50V | 50V |
| Current load (at 40°C) | 1A | 1A |
| Insulation resistance | ≥10 ⁸ Ω | ≥10 ⁸ Ω |
| Transmission features | Cat5e | Cat5e |
| Ambient temperature product | -40°C...+80°C | -40°C...+80°C |
| Contact material | Metal, CuZn, gold-plated | Metal, CuZn, gold-plated |
| Contact-carrier material | Plastic | Plastic |
| Shielding | with shielding | with shielding |
| Material of shielding housing | Metal, CuZn, nickel-plated | Metal, CuZn, nickel-plated |
| Standards | IEC 60603-7-5 | IEC 60603-7-5 |
| Degree of protection (mounted) | IP20 | IP20 |
| Mechanical life-cycle | >750 mating cycles | >750 mating cycles |
| Degree of pollution | 1 | 1 |

| Cable | | Cat5e, PUR, UL, S3400 |
|--|--|---|
| Shielded PUR Ethernet-cable for industrial applications. Fits to real-time requirements according to IEC61158. The cable meets the UL-Style20963 (80°/30V)- and the Cat5 (electrical properties according to EN50288-2-2) requirements. Materials and a constructive setup for increased mechanical stresses (abrasion, bending, vibrations etc.) of the cable. Drag-chain/torsion operations are possible. High tensile strength through incorporated Kevlar-strands. | | |
| Outer diameter of jacket | | 4,80 mm |
| Cable-jacket material | | PUR |
| Jacket color | | GN, similar RAL6018 |
| Wire cross-section | | 1 x 4 x AWG26, star quad |
| Wire insulation material | | PP |
| Wire colors | | WHBU/BU, WHOG/OG |
| Conductor structure | | 19 x 0.10 mm |
| Bending radius (fixed) | | 4 x Ø-cable |
| Bending radius (repeated) | | 7,5 x Ø-cable |
| Temperature range (fixed) | | -40°C...+80°C |
| Transmission features | | Cat5 |
| Rated voltage cable | | 30 V UL rating |
| Special features | | seawater resistant, recyclable, LABS free, RoHs compliant, acid- and alkali resistant, ozone resistant, UV resistant, hydrolysis proof, drag chain-adapted, halogen free, oil resistant, high flexibility, microbes resistant |
| Classification | | |
| eCl@ss 6.0 | | 27061801 |
| eCl@ss 7.0 | | 27060308 |
| eCl@ss 8.0 | | 27060308 |
| eCl@ss 9.0 | | 27060308 |
| ETIM 5.0 | | EC002599 |
| ETIM 6.0 | | EC002599 |