


Receptacle, M8

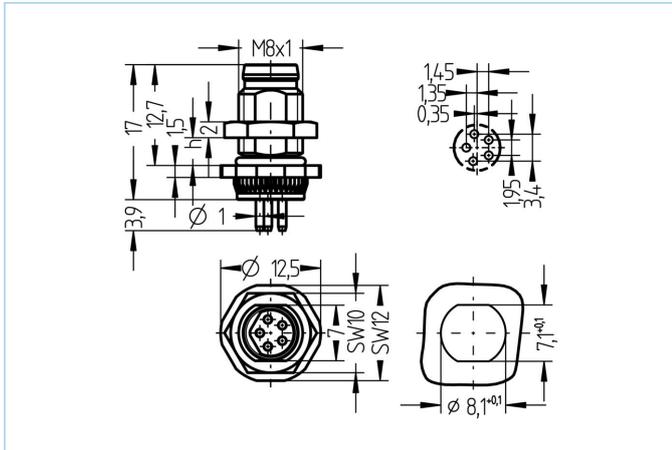

Product data

Item description	AL-FHM8SUB4.5-P/M8
Item-No.	8073399
Customs tariff-No.	85366990
Packaging unit	10
Step-File	AL-FHM8SUB4_5P_M8.stp
EAN	4047106168704

Technical data

Connector	male, straight, M8
Number of pins	5
Coding	B
Rated voltage	30V
Current load (at 40°C)	3A
Ambient temperature product	-30°C...+90°C
Reflow	2 min. 250 °C
Contact material	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, TPU, BK
Receptacle housing material	Metal, CuZn, nickel-plated
Mounting direction	Back wall-mounting (incl. Fixing screw)
Wall thickness area (Δh)	2,0...4,5 mm
Connecting type	Print contact
Adjustable fixing screw	Yes
Fastening thread	M8x1
Standards	IEC 61076-2-104
Degree of protection (mounted)	IP65, IP67, IP68
Mechanical life-cycle	>100 mating cycles
Degree of pollution	3

Classification

eCl@ss 6.0	27279220
eCl@ss 7.0	27440103
eCl@ss 8.0	27440103
eCl@ss 9.0	27440103
ETIM 5.0	EC002061
ETIM 6.0	EC002061