



## Single-ended cordset, High temperature, M12x1

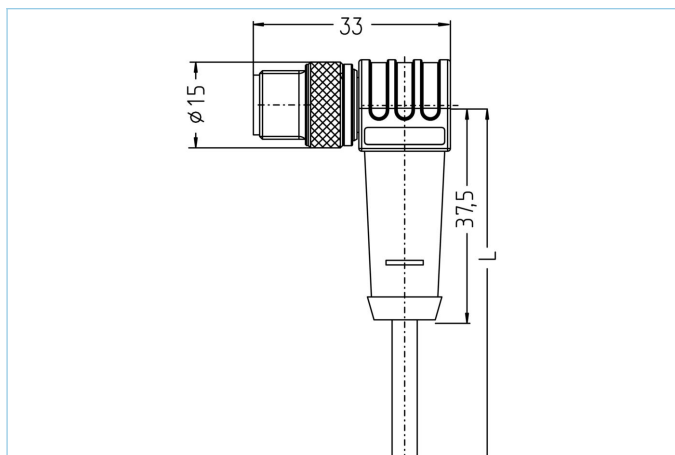

### Product data

Item description	HT-WWAS4.5-5/S2430
Item-No.	8036096
Length	5m
Customs tariff-No.	85444290
Step-File	HT-WWAS4_5.stp
EAN	4047106000813

### Technical data

Connector	male, angled, M12x1
Number of pins	5
Pin assignment	1 BN, 2 WH, 3 BU, 4 BK, 5 GY
Coding	A
Rated voltage	60V
Current load (at 40°C)	4A
Insulation resistance	$\geq 10^9 \Omega$
Ambient temperature product	-20°C...+150°C
Contact material	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, PBT GF, BK
Grip body material	Plastic, PBT GF, BK
Coupling nut material	Metal, CuZn, nickel-plated
Standards	IEC 61076-2-101
Degree of protection (mounted)	IP65
Mechanical life-cycle	>100 mating cycles
Cable end assembly	50mm stripped
Degree of pollution	3

cable		PTFE, S2430, high temp
<p>The thermal resistance of this high-temperature cable extends from -190°C to +260°C. Due to its fully fluorinated jacket and wire insulation, the cable is perfectly suited for applications in high-frequency cables, as control cable in critical temperature areas, and in the computer-, and aviation industry. In addition, it stands out through a very good chemical strength, as well as its ozone- and weather resistance.</p>		
Outer diameter of jacket		3,80 mm
Cable-jacket material		PTFE
Jacket color		WH, similar RAL9003
Wire cross-section		5 x AWG22
Wire insulation material		PTFE
Wire colors		BN, WH, BU, BK, GY
Conductor structure		7 x 0.254 mm
Bending radius (fixed)		5 x Ø-cable
Bending radius (repeated)		10 x Ø-cable
Temperature range (fixed)		-190°C...+260°C
Rated voltage cable		≤250 V
Special features		seawater resistant, LABS free, RoHs compliant, ozone resistant, UV resistant, hydrolysis proof, flexibility at low temperature, non-flammable, low emission of smoke, excellent chemicals resistance, flexible at high temperatures
Classification		
eCl@ss 6.0		27279218
eCl@ss 7.0		27279218
eCl@ss 8.0		27279218
eCl@ss 9.0		27060311
ETIM 5.0		EC001855
ETIM 6.0		EC001855
Accessories		Web-Link
Mounting-set, M12x1		<a href="https://www.escha.net/en/search?sSearch=8047664">https://www.escha.net/en/search?sSearch=8047664</a>
Torque-wrench set		<a href="https://www.escha.net/en/search?sSearch=8055431">https://www.escha.net/en/search?sSearch=8055431</a>
Marking rings Ø 9mm		<a href="https://www.escha.net/en/products/accessoires/marking-rings/">https://www.escha.net/en/products/accessoires/marking-rings/</a>
Cable Stripping Tool		<a href="https://www.escha.net/en/search?sSearch=8066215">https://www.escha.net/en/search?sSearch=8066215</a>
Cable Stripping Tool		<a href="https://www.escha.net/en/search?sSearch=8066216">https://www.escha.net/en/search?sSearch=8066216</a>