


Receptacle, M12

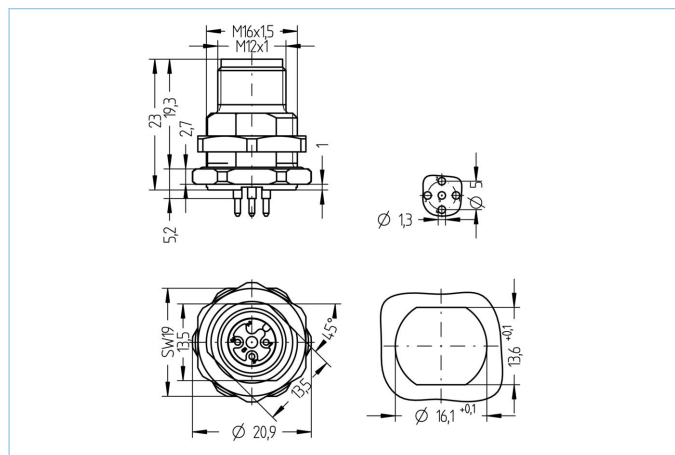

Product data

Item description	AL-FHM12SUA4.5-P/M16
Item-No.	8072352
Customs tariff-No.	85366990
Packaging unit	10
Step-File	AL-FHM12SUA4_5-P_M16.stp
EAN	4047106169558
Substitute for	8029499

Technical data

Connector	male, straight, M12
Number of pins	5
Coding	A
Rated voltage	60V
Current load (at 40°C)	4A
Insulation resistance	≥10 ⁹ Ω
Ambient temperature product	-30°C...+90°C
Reflow	2 min. 250 °C
Contact material	Metal, CuSn, gold-plated
Contact-carrier material	Plastic, PA GF, BK
Receptacle housing material	Metal, CuZn, nickel-plated
Material of external sealing	NBR
Mounting direction	Back wall-mounting (incl. Fixing screw)
Wrench size of fastening nut	A/F19
Connecting type	Print contact
Fastening thread	M16x1.5
Standards	IEC 61076-2-101
Degree of protection (mounted)	IP65, IP67, IP68
Mechanical life-cycle	>100 mating cycles
Degree of pollution	3

Classification	
eCl@ss 6.0	27279220
eCl@ss 7.0	27440103
eCl@ss 8.0	27440103
eCl@ss 9.0	27440103
ETIM 5.0	EC002061
ETIM 6.0	EC002061