

Technical drawing of the LED lighting fixture showing front, side, and top views with dimensions.

Front View (Left): Shows the fixture with a width of 274 mm. The LED array is indicated by a dashed line and the label "LED".



Side View (Middle): Shows the fixture with a height of 269 mm. The mounting bracket is indicated by a dashed line and the label "M3".

Top View (Right): Shows the fixture with a width of 18 mm. The mounting bracket is indicated by a dashed line and the label "M3". The total height is 45 mm. The mounting bracket is labeled "1".

Front View (Bottom): Shows the fixture with a width of 274 mm. The LED array is indicated by a dashed line and the label "LED".

Side View (Bottom): Shows the fixture with a height of 636 mm. The mounting bracket is indicated by a dashed line and the label "M3".

Top View (Bottom): Shows the fixture with a width of 18 mm. The mounting bracket is indicated by a dashed line and the label "M3". The total height is 12 mm. The mounting bracket is labeled "2".

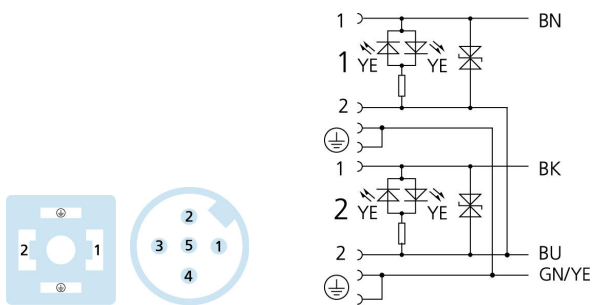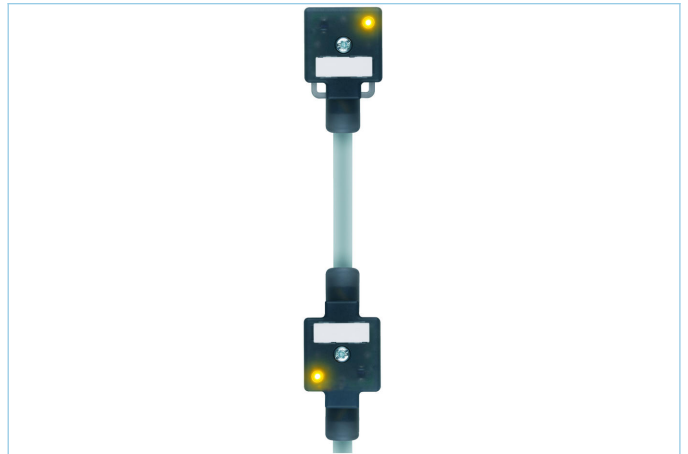

Item description	VA22-24.3-0,15-DA22-24.3-10/P01
Item-No.	8055757
Length	10m
Distance of valve connectors	0.15m
Customs tariff-No.	85444290
Step-File	VA22-24_3-L-DA22-24_3-m_S_.stp
EAN	4047106140847

PVC-cable for measurement and control-, and sensor technology. Suitable for applications in dry areas on packaging machines, assembly- and conveyor technology. High flexibility with unstressed movement (conditional drag-chain application possible). Predesigned for applications in food- and beverage industry. P01-cables meet the UL and CSA (UL1729/2464; cULus) requirements.

Outer diameter of jacket	6,40 +/- 0,2 mm
Cable-jacket material	PVC
Jacket color	GY, similar RAL7040
Wire cross-section	4 x 0.75 mm²
Wire insulation material	PVC
Wire colors	BN, BK, BU, GNYE
Conductor structure	24 x 0,20 mm
Bending radius (fixed)	5 x Ø-cable
Bending radius (repeated)	10 x Ø-cable
Temperature range (repeated)	0°C...+80°C
Temperature range (fixed)	-25°C...+80°C
Rated voltage cable	≤300 V
Special features	seawater resistant, recyclable, LABS free, RoHs compliant, acid- and alkali resistant, ozone resistant, UV resistant

Classification

eCl@ss 6.0	27279218
eCl@ss 7.0	27279218
eCl@ss 8.0	27279218
eCl@ss 9.0	27060312
ETIM 5.0	EC001855
ETIM 6.0	EC001855

Accessories

Labels, Valve connector

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8047109/Labels-valve-connector-housing-styles-B/B1/C/C1>

Fixing screw

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8060907/Stainless-steel-screws-for-valve-connector-M3x28>