
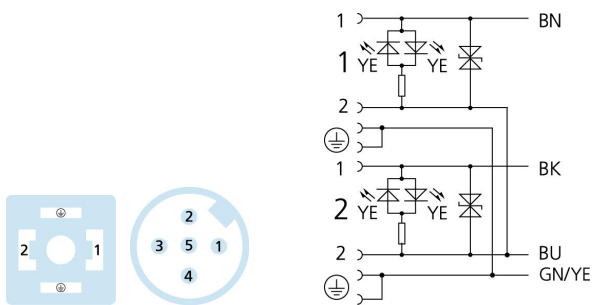


Technical drawing of the LED lighting fixture showing front, side, and top views with dimensions:

- Front View (Left):** Shows the fixture with a width of 274 mm and a height of 274 mm. The LED chip is indicated by a dashed line and the label "LED".
- Side View (Middle):** Shows the fixture with a width of 269 mm and a height of 636 mm. The mounting bracket is indicated by a dashed line and the label "M3".
- Top View (Right):** Shows the fixture with a width of 18 mm and a height of 18 mm. The mounting bracket is indicated by a dashed line and the label "M3". The top view also shows the LED chip and the label "LED".
- Dimensions:**
 - Overall width: 274 mm
 - Overall height: 274 mm
 - Mounting bracket width: 269 mm
 - Mounting bracket height: 636 mm
 - LED chip width: 18 mm
 - LED chip height: 18 mm
 - Mounting bracket height (L1): 45 mm
 - Mounting bracket height (L2): 11 mm

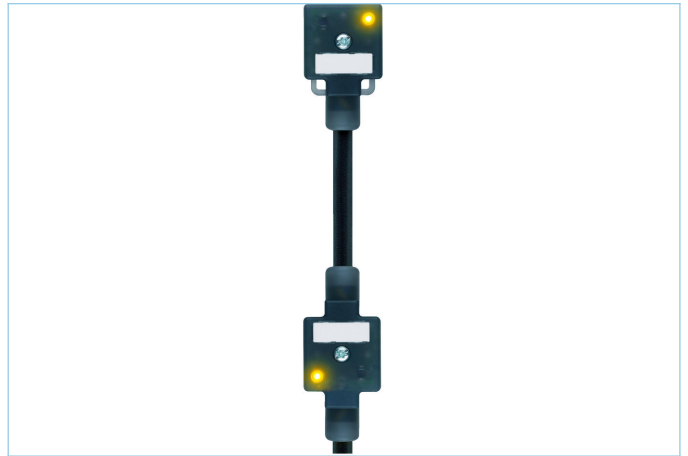

Item description	VA22-24.3-0,15-DA22-24.3-5/S370
Item-No.	8055744
Length	5m
Distance of valve connectors	0.15m
Customs tariff-No.	85444290
Step-File	VA22-24_3-L-DA22-24_3-m_S_.stp
EAN	4047106140717

Cable **PUR, UL, S370**

Flexible, silicone- and halogen-free control line with high mechanical strength. The cable is chemicals, hydrolysis-, and microbes- resistant. The drag-chain application is possible at a bending radius of minimum 10 x d. Due to its weld-field immunity, the cable is very well suited for the flexible application in robotics, machine-tool, and metal-cutting production. The cables meet the UL and CSA (UL10493/20549; cULus) requirements.

Outer diameter of jacket	6,4 +/- 0,2 mm
Cable-jacket material	PUR
Jacket color	BK, similar RAL9005
Wire cross-section	4 x 0.75 mm ²
Wire insulation material	PP
Wire colors	BN, BK, BU, GNYE
Conductor structure	42 x 0,15 mm
Bending radius (fixed)	5 x Ø-cable
Bending radius (repeated)	10 x Ø-cable
Temperature range (repeated)	-30°C...+90°C
Temperature range (fixed)	-40°C...+90°C
Temperature range (drag chain)	-25°C...+60°C
Drag chain-application	2 Mio. cycles
Halogen-free	Yes
Rated voltage cable	≤300 V
Special features	flame retardant, seawater resistant, recyclable, LABS free, RoHs compliant, acid- and alkali resistant, ozone resistant, UV resistant, hydrolysis proof, drag chain-adapted, torsion resistant, welding sparks resistant, halogen free, silicone free, oil resistant

Classification

eCl@ss 6.0	27279218
eCl@ss 7.0	27279218
eCl@ss 8.0	27279218
eCl@ss 9.0	27060312
ETIM 5.0	EC001855
ETIM 6.0	EC001855

Accessories

Labels, Valve connector

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8047109/Labels-valve-connector-housing-styles-B/BI/C/CI>

Fixing screw

<https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8060907/Stainless-steel-screws-for-valve-connector-M3x28>