


[Article Page](#)


Product Description

ultrasonic sensor

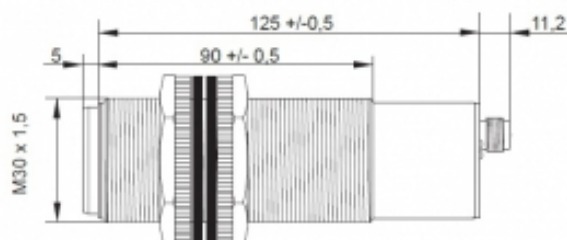

Name	KURT350-M30KB125-ANU-DPA-V2
Order number	08409862763
Matchcode	9986-2763
art_schaltabstand_einstellbar	yes
Switch type	 analog/digital
Signal Type	0-10V PNP
Connection	 Connector

Connection diagramm

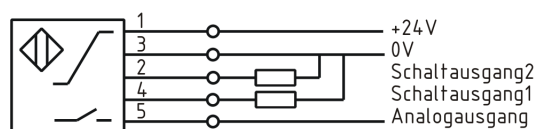

Dimension (in mm)	M30 x 128,5
-------------------	-------------

Technical Specification

Signal type	Taster
Operating voltage	19 - 30 VDC
Max. load current	100 mA
No load current	45 mA
Switching frequency	8 Hz
Switching hysteresis	1 %
Operating temperature	-15 ° C to 70 ° C
Repeat accuracy	+/- 0,4% +/- 2mm
Linearity	+/- 0,5 %
Operating state	LED
Switching state	LED

Analog output	Pulso_has1
Time delay	200 ms
Carrier frequency	300 kHz
Sound beam	ca. 8°
Pulse rate of rise	teach in
Measuring range	6-35 cm
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-7:2004-06/DIN EN 60947-5-2:2008
Housing material	Plastic
Termination	Connector M12 5pol

Errors and omissions excepted