



Product Description

Touch Sensor

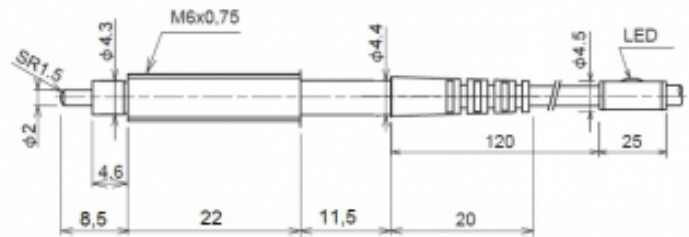

Name	CS067A-L
Order number	08430131020
Switch type	 N.O.
Signal Type	mechanical contact
Connection	Cable 3m
Connection diagramm	

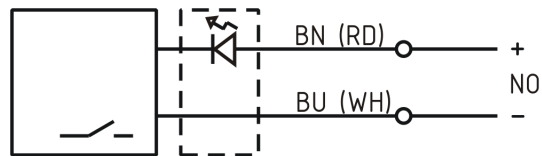

Dimension (in mm)	fine-pitch thread M6x0,75 x l = 42
art_gewicht	51 g

Technical Specification

Operating voltage	5 - 24 V DC
Max. load current	10 mA
Switching hysteresis	0
Operating temperature	0 ° C to 80 ° C
Temperature drift	0
Repeat accuracy	0,005 mm (at operating speed 50 ... 200 mm/min)
Switching state	LED
Stroke	2,8 mm
Pre-travel	0,3 mm
Accuracy	0,005 mm
Probe tip	Zylinder 2/R 1,5
Probe tip material	Edelstahl
Operation load	1 N
art ttl mech	10 Mio. operating cycles

Protection category	IP65
Wiring	Zweidraht/ Two wire
Housing material	Stainless steel V2A
Termination	cable 3 m, 2 wire, Ø 2.8 mm, oil resistant
Approach direction	axial

Errors and omissions exceptet