



[Article Page](#)

Product Description

ultrasonic sensor

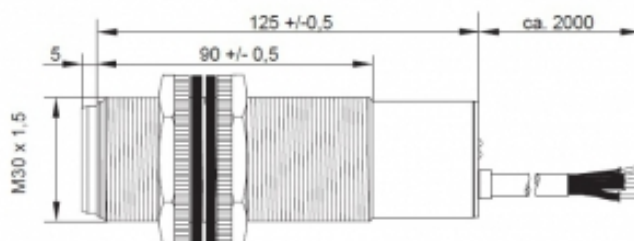

Name	KURT3500-M30KB125-ANU
Order number	08400830300
Matchcode	9983-0300
Switch type	 analog
Signal Type	Analog Voltage
Connection	 Cable
Connection diagramm	

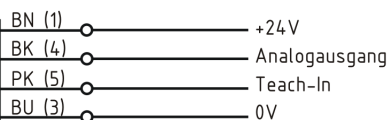

Dimension (in mm)	M30 x 130
-------------------	-----------

Technical Specification

Signal type	Taster
Operating voltage	15 - 30 VDC
No load current	< 40 mA
Operating temperature	-15 ° C to 70 ° C
Repeat accuracy	+/- +/- 2 mm +/- 0,4%
Linearity	0,3 %
Operating state	LED
Analog output	Pulso_has10-10V
Time delay	400 ms
Carrier frequency	130 kHz
Sound beam	ca. 8
Pulse rate of rise	teach in

Measuring range	30-350 cm
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-7:2004-06
Housing material	Plastic
Termination	2m PVC 3x0,34mm ²

Errors and omissions exceptet