
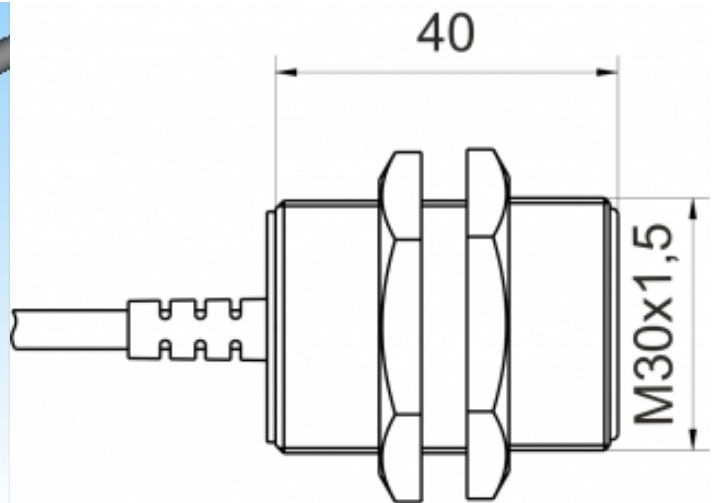


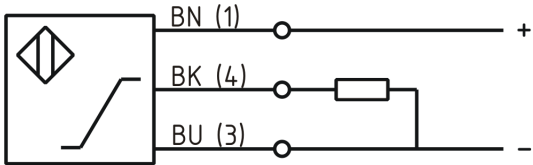

Name	KJ9-M30MB40-ANI
Order number	08317141600
Matchcode	9914-1600
Switching distance	from 1 mm to 9 mm
Mounting	 shielded
Switch type	 analog
Signal Type	analog current
Connection	 Cable
Connection diagramm	

Dimension (in mm)	fine-pitch thread M30 x 40
-------------------	----------------------------

Special features	Output Current 4 ... 20 mA
Operating voltage	11 - 35 VDC
Max. ripple	≤ 5 %
No load current	≤ 10 mA
Switching frequency	300 Hz
Operating temperature	-25 ° C to 70 ° C
Temperature drift	+/-5 %
Repeat accuracy	≤ 1 %

Linearity	≤ 5 %
Time delay	300 ms
Resolution	2 mA / mm
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-7:2004-06
Housing material	Brass, nickel plated
Material active face	PCB
Cable length	2 m
Utilisation category	DC 13
Cable material	PVC LIYY grau (grey)
Nominal operating voltage	24 V DC
Cable cross	3x0.34 mm ²
internal load resistor	