


[Article Page](#)

Product Description	inductive sensor AC/DC
Name	KJ4-M12MN70-VZÖ
Order number	08317251700
Switching distance	4 mm
Mounting	 non shielded
Switch type	 N.C.
Signal Type	AC/DC
Connection	 Cable

Connection diagramm

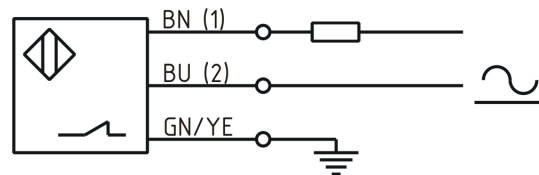

Dimension (in mm)	fine-pitch thread M12 x 70
-------------------	----------------------------

Technical Specification	
Operating voltage	20 - 250 V AC/DC
Voltage drop	5 V
Max. load current	300 mA
Leakage current	$\leq 1,7$ mA
Switching frequency	30
Switching hysteresis	≤ 15 %
Operating temperature	-25 ° C to 70 ° C
Temperature drift	≤ 10 %
Repeat accuracy	≤ 5 %
Switching state	LED
Digital output	
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Material active face	PCB
Termination	2m PVC 3x0,5mm ²

werden.

Notes

Kurzschluss- und Überlastungsschutz rastend. Nach Beseitigung des Kurzschlusses muß die Spannungsversorgung für ca. 2s unterbrochen

Errors and omissions excepted