
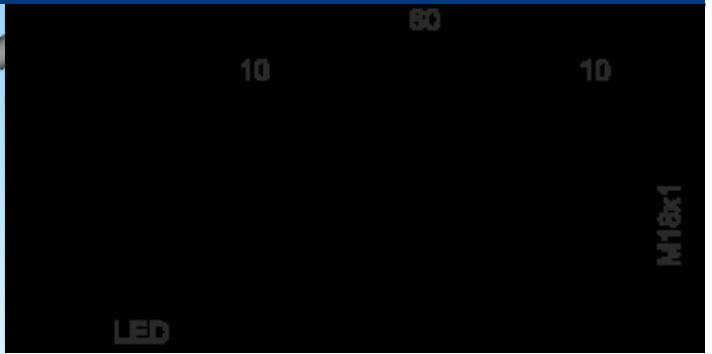


[Article Page](#)

Product Description

inductive sensor analogue

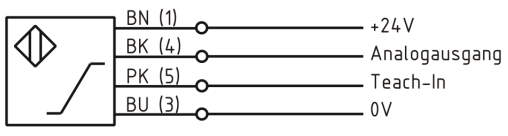

Name	KJ10-M18MN60-ANU-DPSS
Order number	08317144730
art_schaltabstand_einstellbar	yes
Switching distance	10 mm
Mounting	 non shielded
Switch type	 Programmable
Signal Type	Analog Voltage
Connection	 Cable
Connection diagramm	

Dimension (in mm)	fine-pitch thread M18 x 60
-------------------	----------------------------

Technical Specification

Special features	analog Output with two additional teachable digital switching points
Operating voltage	11 - 30 V DC
Max. ripple	≤ 5 %
Voltage drop	3 V
No load current	≤ 10 mA
Switching frequency	200 Hz
Operating temperature	-25 ° C to 70 ° C
Temperature drift	+/-8 %

Repeat accuracy	≤ 1 %
Linearity	≤ 3 %
Time delay	300 ms
Protection category	IP67
EMC-level	DIN EN 60947-5-7:2004-06
Housing material	Brass, nickel plated
Material active face	PA 6.6
Cable length	2 m
Utilisation category	DC 13
Cable material	PVC LIYY grau (grey)
Nominal operating voltage	24 V DC
Cable cross	4x0.34 mm ²
FIT / MTTF acc. to SIEMENS 29500	334,07 / 342y

Errors and omissions excepted