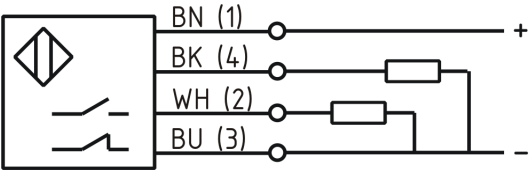


[Article Page](#)

Product Description		polarized reflex light barrier
Name	KORP6000-M30MB78-DPA-RT	
Order number	08362255017	
Matchcode	M30B-L6000P-CX6C4U2-PF	
Switch type	 Changeover	
Signal Type	DC PNP	
Illuminant	 Red light 650 nm	
Connection	 Cable	
Connection diagramm		

Technical Specification	
Signal type	Polarized retroreflective sensor
Operating voltage	10 - 30 V DC
Max. load current	150 mA
No load current	< 30 mA
Switching frequency	150
Operating temperature	-25 ° C to 70 ° C
Operating state	LED
Swiching state	LED
Digital output	
Measuring range	6 m
Sensitivity adjustable	ja
Sensing range adjustable	nein
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Termination	2m PVC 4x0,5mm ²

Errors and omissions exceptet