
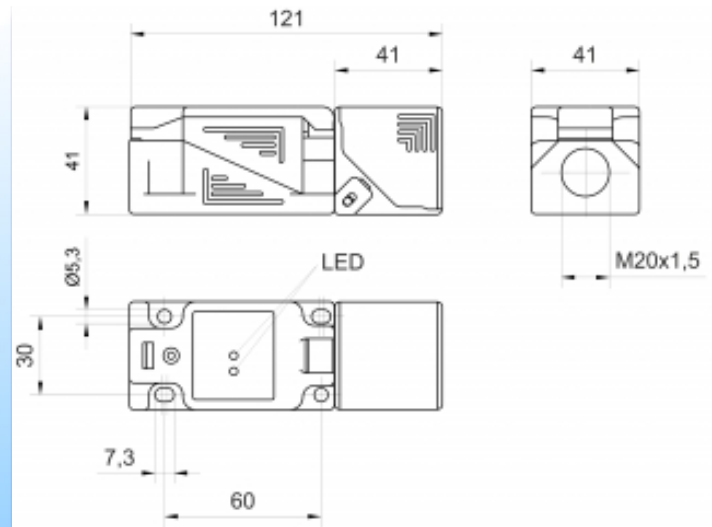


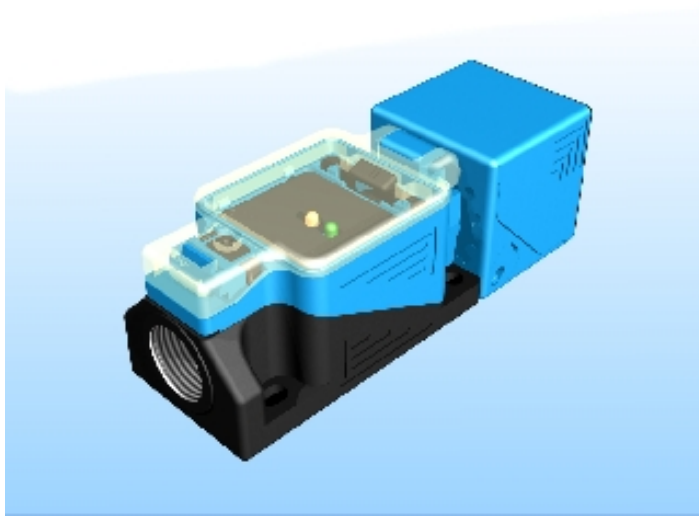

Name
Order number
Matchcode
Switching distance
Mounting

Switch type


Signal Type
Connection
Connection diagramm

KJ20-Q40KN-ANU
08317141100
9814-1100
from 10 mm to 20 mm

 non shielded

 analog

Analog Voltage
Terminal

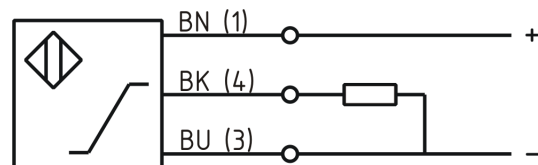

Dimension (in mm)

Q 40 x 40 x 120

Special features

Output Voltage 1 ... 9 Volt
rotatable sensor head

Operating voltage

18 - 30 VDC

Max. ripple

≤ 10 %

No load current

≤ 10 mA

Switching frequency

25 Hz

Operating temperature

-25 ° C to 70 ° C

Temperature drift

+/- 10 %

Repeat accuracy

≤ 5 %

Linearity	≤ 3 %
Time delay	500 ms
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-7:2004-06
Housing material	Trogamid
Material active face	Trogamid T
Utilisation category	DC 13
Nominal operating voltage	24 V DC
Termination	Terminal 1,5mm ²
internalt load resistor	