


[Article Page](#)

Product Description

inductive sensor DC

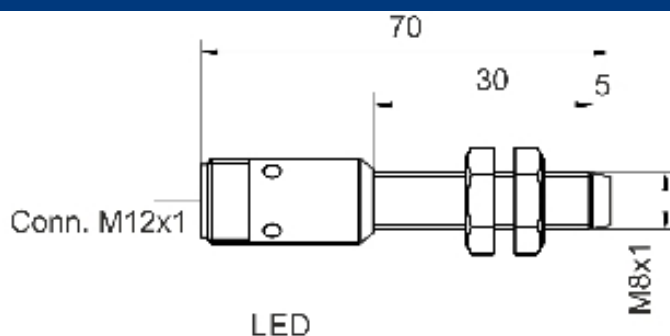

Repeat accuracy	≤ 2 %
Switching state	LED
Time delay	300 ms
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Housing material	Brass, nickel plated
Material active face	POM
Utilisation category	DC 13
Contact material	Cu
Contact surface material	NiAu
Termination	Connector M12 4pin