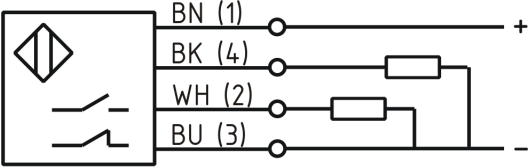


[Article Page](#)

Product Description	
Name	KJR-D200AN-DPA-V2
Order number	08317160665
Mounting	 non shielded
Switch type	 Changeover
Signal Type	DC PNP
Connection	 Connector
Connection diagramm	
Dimension (in mm)	R 305 x 162 x 305
Technical Specification	
Operating voltage	10 - 30 VDC
Max. ripple	$\leq 10 \%$
Voltage drop	2,4 V
Max. load current	50 mA
No load current	$< 10 \text{ mA}$
Leakage current	$\leq 10 \mu\text{A}$
Switching frequency	300
Switching hysteresis	$\leq 15 \%$
Operating temperature	-25 ° C to 70 ° C
Switching state	LED
Digital output	
Real sensitivity	15,0 mm Kugel Fe
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP54
EMC-level	DIN EN 60947-5-2:2008
Housing material	Aluminum
Termination	Connector M12 4pol

Errors and omissions excepted