
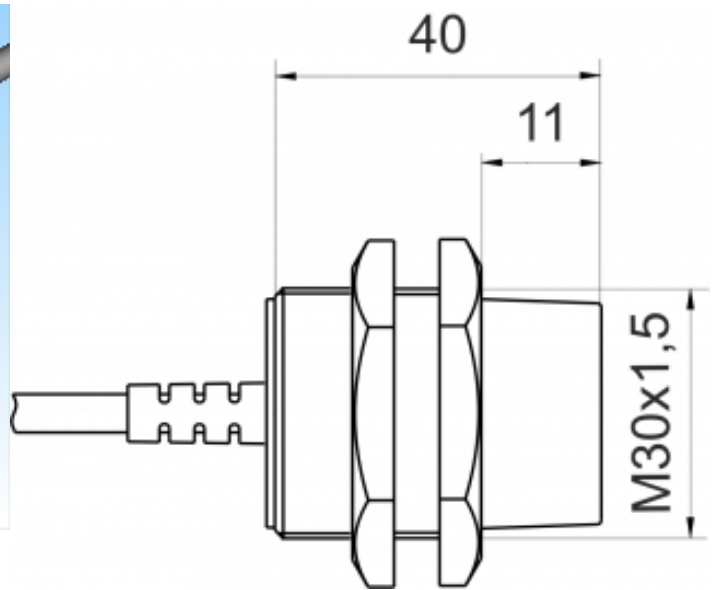


[Article Page](#)

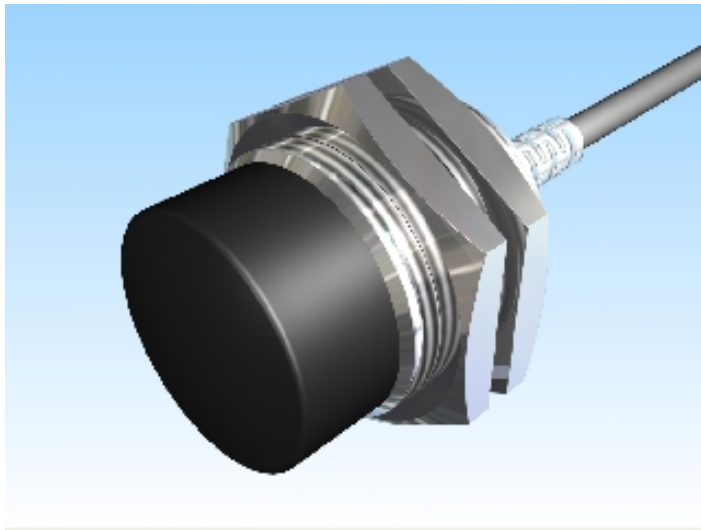

Name

KJ15-M30MN40-ANU

Order number

08317144600

Switching distance

from 3 mm to 15 mm

Mounting



non shielded

Switch type




analog

Signal Type


Analog Voltage

Connection



Cable

Connection diagramm

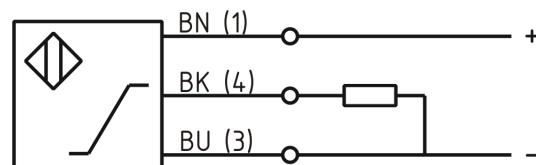

Dimension (in mm)

fine-pitch thread M30 x 40

Special features

Output Voltage 1 ... 9 Volt

Operating voltage

11 - 35 VDC

Max. ripple

≤ 10 %

No load current

≤ 5 mA

Switching frequency

150 Hz

Operating temperature

-25 ° C to 70 ° C

Temperature drift

+/- 5 %

Repeat accuracy

≤ 1 %

Linearity	≤ 5 %
Analog output	Pulso_has-1
Time delay	300 ms
Resolution	0,67 V / mm
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-7:2004-06
Housing material	Brass, nickel plated
Material active face	PCB
Cable length	2 m
Utilisation category	DC 13
Cable material	PVC LIYY grau (grey)
Nominal operating voltage	24 V DC
Cable cross	3x0.34 mm ²
internal load resistor	