
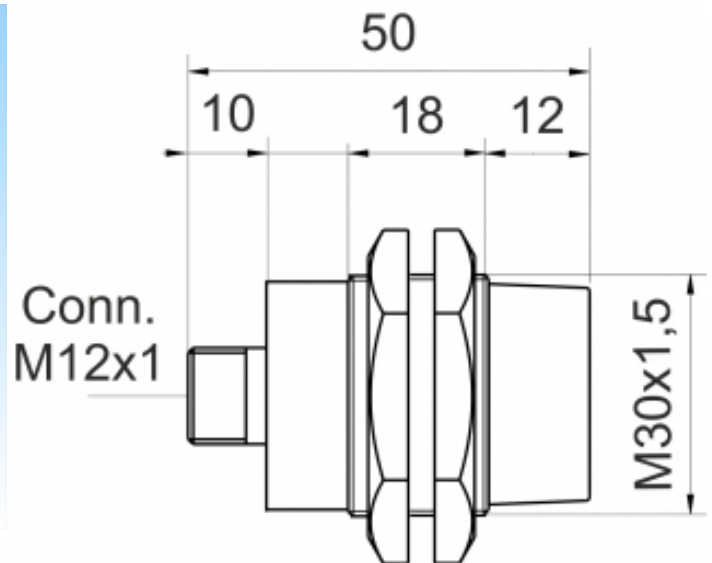


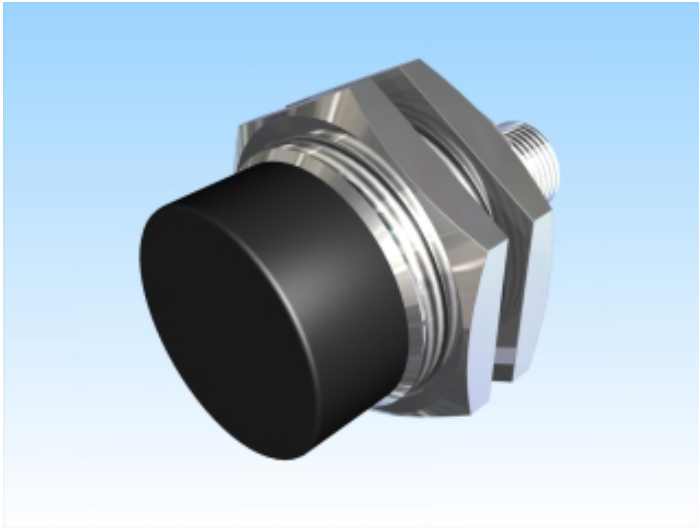

Name
Order number
Switching distance
Mounting

Switch type

Signal Type
Connection
Connection diagramm

KJ15-M30MN50-ANU-V2

08317144665


from 3 mm to 15 mm

 non shielded

 analog

Analogue Voltage

connector M12

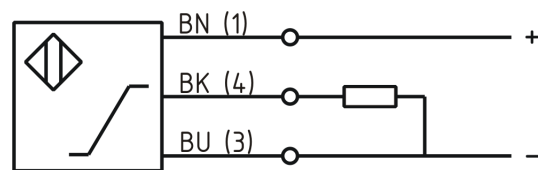

Dimension (in mm)

fine-pitch thread M30 x 50

Special features
Operating voltage
Max. ripple
No load current
Switching frequency
Operating temperature
Temperature drift
Repeat accuracy
Linearity

Output Voltage 1 ... 9 Volt

11 - 35 VDC

≤ 10 %

≤ 5 mA

150 Hz

-25 ° C to 70 ° C

+/- 5 %

≤ 1 %

≤ 5 %



KJ15-M30MN50-ANU-V2

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Analog output	Pulso_has-1
Time delay	300 ms
Resolution	0,67 V / mm
Protection category	IP67
EMC-level	DIN EN 60947-5-7:2004-06
Housing material	Brass, nickel plated
Material active face	PCB
Utilisation category	DC 13
Contact material	CuSn
Contact surface material	NiAu
Contact holder	PA 6
Nominal operating voltage	24 V DC
Termination	Connector M12 4pin
internal load resistor	