


[Article Page](#)


Product Description

color sensor

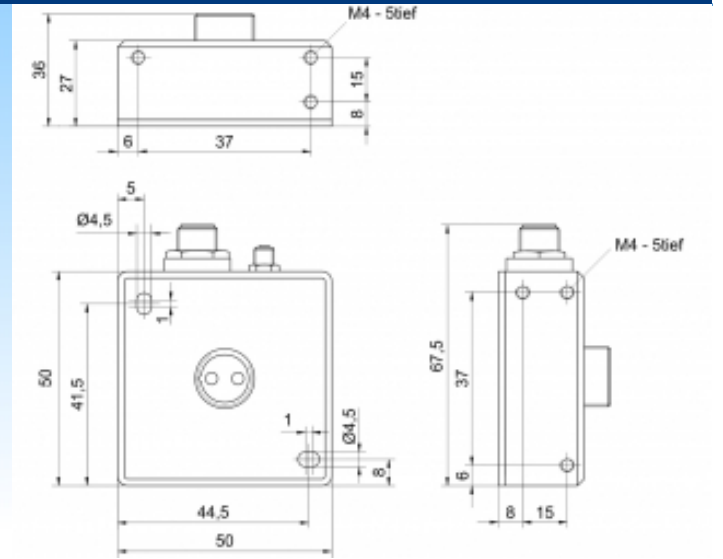


Name	SPECTRO-3-FIO-SLA
Order number	08386009410
Switch type	 analog
Signal Type	Analog Current/Voltage
Illuminant	 White light
Connection	Connector 8pin
Polschema	

SPS
Binder 713/163,
8 pol.



- 1 wh GND (0V)
- 2 bn +24V DC ($\pm 10\%$)
- 3 gn IN 0
- 4 ye OUT 0
- 5 gy OUT 1
- 6 pk OUT2
- 7 bu OUT 3
- 8 rd OUT 4

PC
Binder 707, 4 pol.



- 1 +24V DC
- 2 GND (0V)
- 3 RxD
- 4 TxD

Dimension (in mm)

Q 50 x 27 (+9) x 50

Technical Specification

Special features	Big assortment of fiber optics available (reflected light or transmitted light operation)
Signal type	Fibre-optic sensor
Operating voltage	22,60 - 26,40 V DC
No load current	160 mA
Temperature drift	< 0,01 %/ °C
Repeat accuracy	+/- 1 Digit in the X, Y color range at 12-bit A/D conversion
Analog output	Pulso_has1, ANA OUT R (red), ANA OUT gG (green), ANA OUT B (blue) (Pin 6, 7 and 8): Voltage output 0...+10V or current output 4...20mA (R,G,B or X,Y,INT or s,i,M)
Natural extraneous light	5000 Lux in AC-mode
Artificial extraneous light	5000 Lux in AC-mode
Amplifying adjustable	8 fach/ 8-fold
Working range	from 1 to 500 mm
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP64
EMC-level	DIN EN 60947-5-2
Housing material	Aluminum
Termination	connection to PLC: plug m12, 8 pole, connection to PC: 4-pole fem. connector (Binder Series 707)

Errors and omissions exceptet