
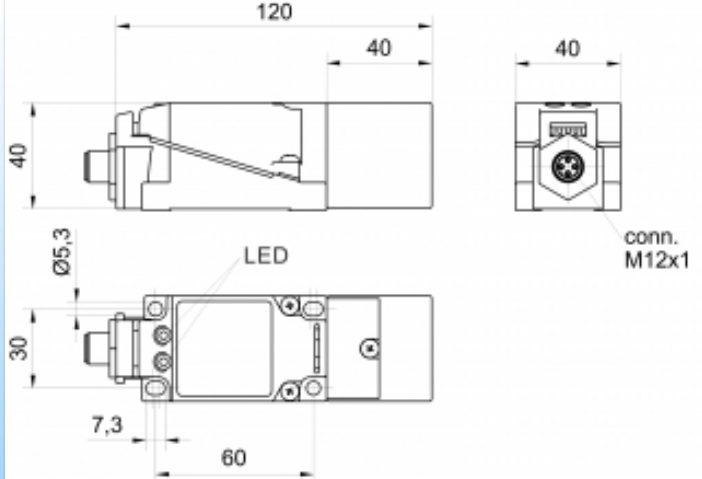



[Article Page](#)

Product Description

inductive sensor DC

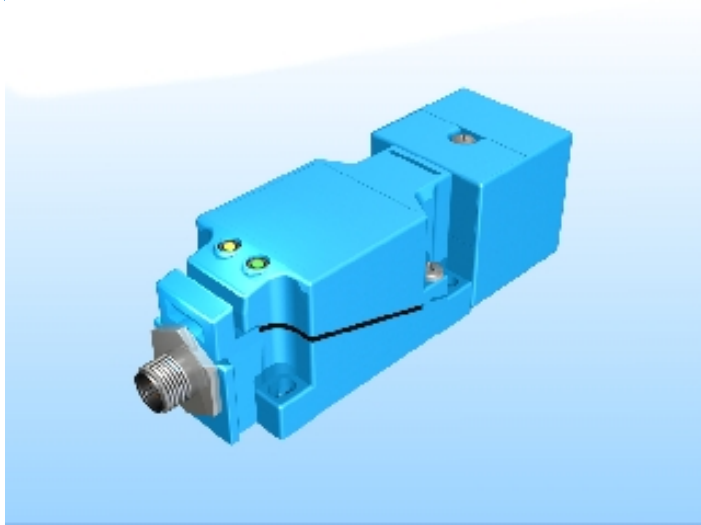

Name	KJ25-Q40KT-DNU-V2
Order number	08317633465
Matchcode	9863-3465
Switching distance	25 mm
Mounting	 non shielded
Switch type	 Switchable
Signal Type	DC NPN
Connection	connector M12
Connection diagramm	

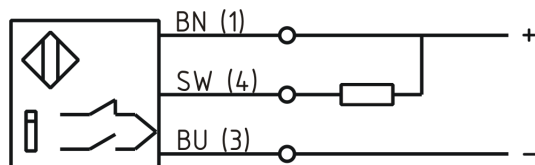

Dimension (in mm)	Q 40 x 40 x 120
-------------------	-----------------

Technical Specification

Operating voltage	10 - 30 V DC
Max. ripple	≤ 10 %
Voltage drop	2,4 V
Max. load current	400 mA
No load current	≤ 34 mA
Leakage current	≤ 10 µA
Switching frequency	150
Switching hysteresis	≤ 20 %
Operating temperature	-25 ° C to 70 ° C

Temperature drift	≤ 10 %
Repeat accuracy	≤ 5 %
Operating state	LED
Switching state	LED
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2: 2008
Housing material	Trogamid
Utilisation category	DC 13
Termination	Connector M12 4pol

Errors and omissions excepted