


[Article Page](#)

Product Description		reflex light barrier
Name	KORS2000-Q20KB-DPA-RT	
Order number	08362205002	
Matchcode	UP-L2000P-CX6C4U2	
Switch type	 Changeover	
Signal Type	DC PNP	
Illuminant	 Red light 660 nm	
Connection	 Cable	

Connection diagramm

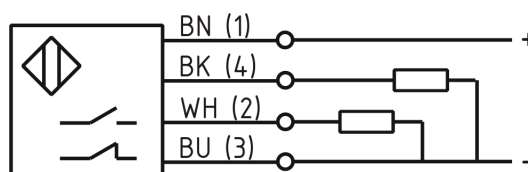

Dimension (in mm) 8 x 20 x 35

Technical Specification

Signal type	Retroreflective sensor
Operating voltage	10 - 30 V DC
Max. load current	150 mA
No load current	< 25 mA
Switching frequency	300
Operating temperature	-20 ° C to 55 ° C
Operating state	LED
Swiching state	LED
Digital output	
Measuring range	2 m
Sensitivity adjustable	ja
Sensing range adjustable	nein
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Housing material	Plastic
Termination	2m PVC 4x0,15mm ²

Errors and omissions exceptet