



[Article Page](#)

Product Description

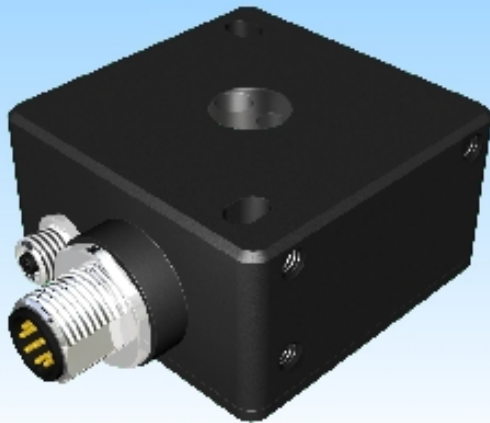


color sensor

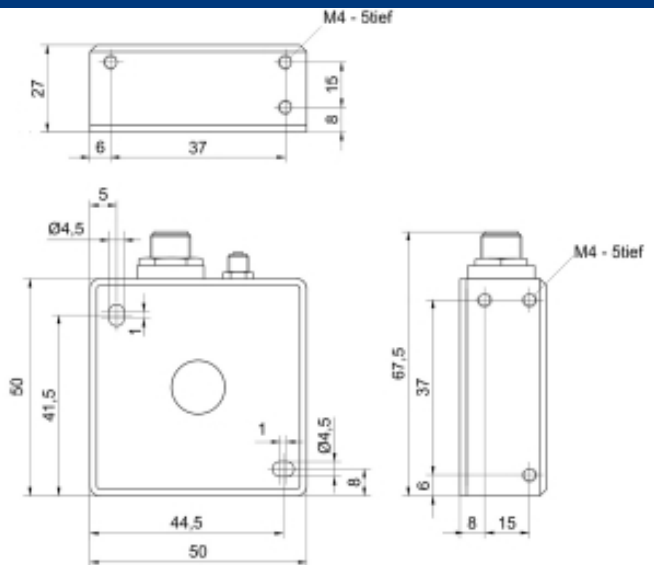


Name	SPECTRO-3-POL-SLA
Order number	08386169410
Switch type	 analog
Signal Type	Analog Current/Voltage
Illuminant	 White light
Connection	Connector 8pin
Polschema	

SPS
Binder 713/163,
8 pol.



- | | | |
|---|----|------------------------|
| 1 | wh | GND (0V) |
| 2 | bn | +24V DC ($\pm 10\%$) |
| 3 | gn | IN 0 |
| 4 | ye | OUT 0 |
| 5 | gy | OUT 1 |
| 6 | pk | OUT2 |
| 7 | bu | OUT 3 |
| 8 | rd | OUT 4 |

PC
Binder 707, 4 pol.



- 1 +24V DC
2 GND (0V)
3 RxD
4 TxD

Dimension (in mm)	Q 50 x 27 x 50
-------------------	----------------

Technical Specification

Special features	Polarisation filter (for very strong reduction of gloss effect), Color and gray scale detection
Operating voltage	22,60 - 26,40 V DC
No load current	160 mA
Temperature drift	< 0,01 %/ °C
Repeat accuracy	+/- 1 Digit in the X, Y color range at 12-bit A/D conversion
Analog output	Pulso_has1, ANA OUT R (red), ANA OUT gG (green), ANA OUT B (blue) (Pin 6, 7 and 8): Voltage output 0...+10V or current output 4...20mA (R,G,B or X,Y,INT or s,i,M)
Natural extraneous light	5000 Lux in AC-mode
Artificial extraneous light	5000 Lux in AC-mode
Material of light outlet	Glas
Amplifying adjustable	8 fach/ 8-fold
Working range	from 5 to 50 mm
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP64
EMC-level	DIN EN 60947-5-2
Housing material	Aluminum
Termination	connection to PLC: plug m12, 8 pole, connection to PC: 4-pole fem. connector (Binder Series 707)

Errors and omissions exceptet