


[Article Page](#)

Product Description		inductive sensor AC	
Name	KJ15-M30MN60-AZÖ		
Order number	08317162300		
Matchcode	9916-2300		
Switching distance	15 mm		
Mounting	 non shielded		
Switch type	 N.C.		
Signal Type	AC		
Connection	 Cable		
Connection diagramm			
Dimension (in mm)	fine-pitch thread M30 x 60		
Technical Specification			
Operating voltage	20 - 250 VAC		
Voltage drop	5 V		
Max. load current	300 mA		
Leakage current	≤ 2 mA		
Switching frequency	15		
Switching hysteresis	≤ 15 %		
Operating temperature	-25 ° C to 70 ° C		
Temperature drift	≤ 10 %		
Repeat accuracy	≤ 5 %		
Switching state	LED		
Digital output			
Short-circuit proof	yes		
Overload protection	yes		
Reverse voltage protection	yes		
Protection category	IP67		
EMC-level	DIN EN 60947-5-2:2008		
Material active face	PCB		
Termination	2m PVC 3x0,5mm²		

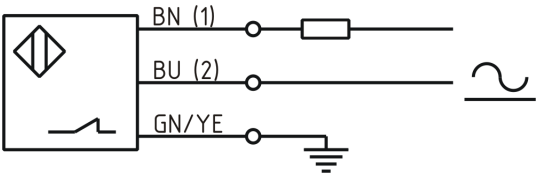

KJ15-M30MN60-AZÖ

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Errors and omissions excepted