
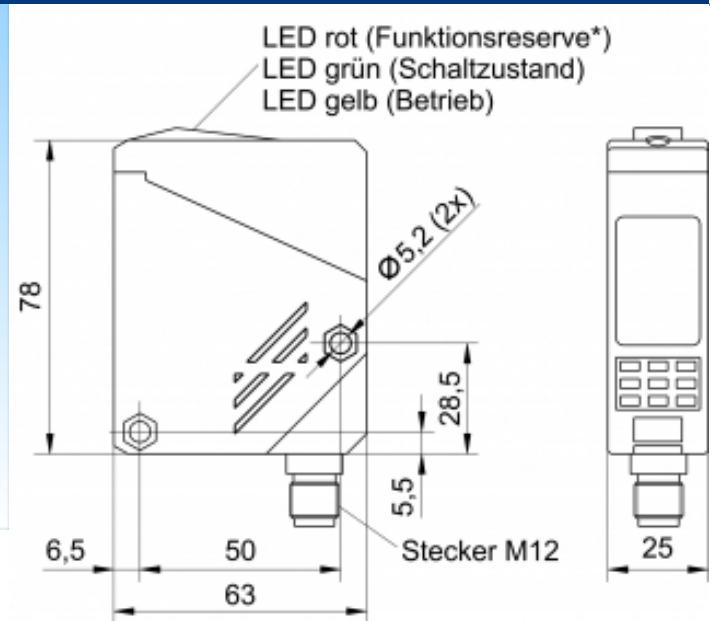
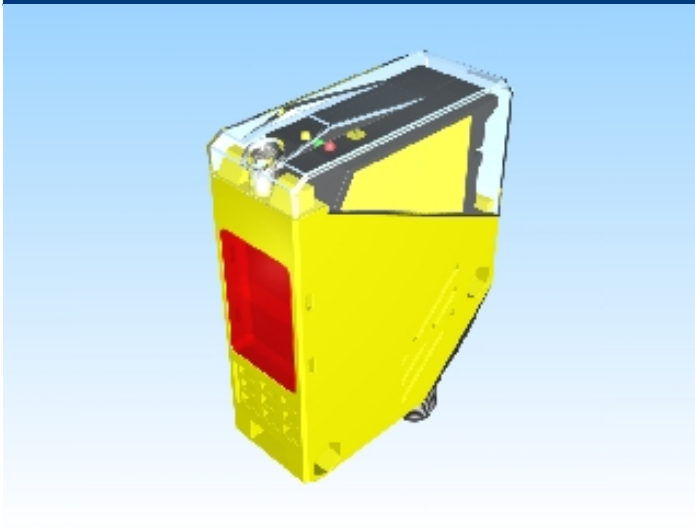


[Article Page](#)

Product Description

reflex light barrier

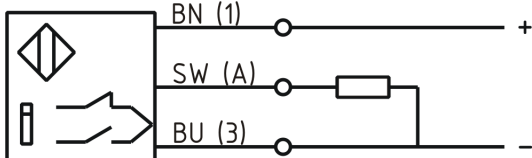

Name	KORP10M-Q76KB-DPU-V2-RT
Order number	08362280026
Switch type	 Switchable
Signal Type	PNP
Illuminant	 Red light 660 nm
Connection	connector M12
Connection diagramm	

Dimension (in mm)	Q 25 x 77.5 x 63
-------------------	------------------

Technical Specification

Signal type	Polarized retroreflective sensor
Operating voltage	10 - 30 V DC
Max. load current	100 mA
No load current	< 35 mA
Switching frequency	500 Hz
Operating temperature	-25 ° C to 55 ° C
Operating state	LED
Swiching state	LED
Measuring range	10 m
Sensitivity adjustable	ja

Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Housing material	Plastic
Termination	Connector M12 4pol (pivotable: 0° oder 90°)

Errors and omissions exceptet