
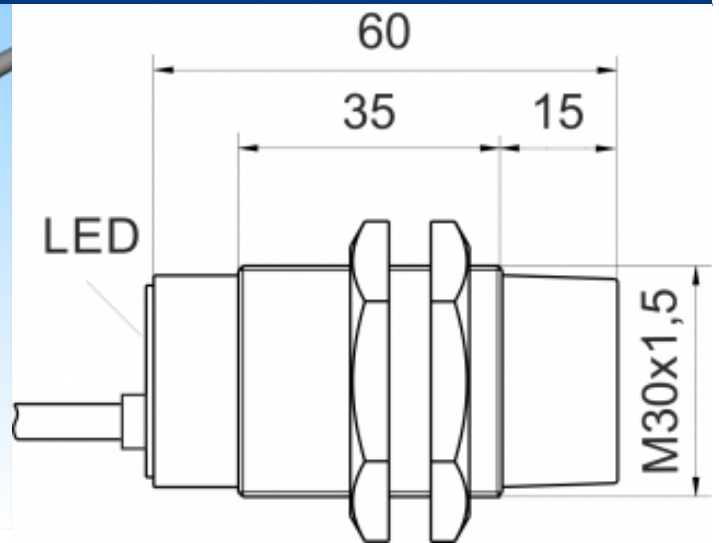


[Article Page](#)


Product Description

inductive sensor weld immune

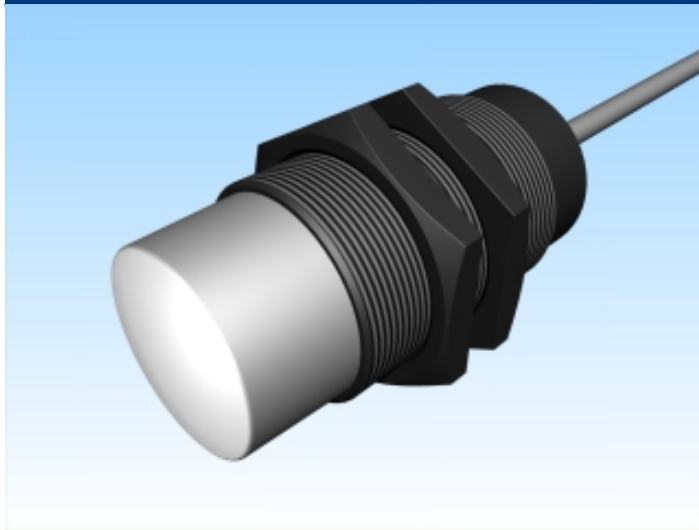

Name	KJ15-M30MN60-DPS-SF
Order number	08317665900
Matchcode	9966-5900
Switching distance	15 mm
Mounting	 non shielded
Switch type	 N.O.
Signal Type	DC PNP
Connection	 Cable

Connection diagramm

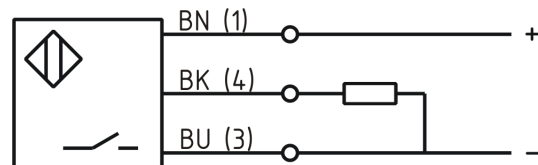

Dimension (in mm)	fine-pitch thread M30 x 60
-------------------	----------------------------

Technical Specification

Special features	resistant against welding current up to 20 kA in a distance of 25mm to wires proofed against alternating magnetic fields up to 150 mT
Operating voltage	10 - 30 V DC
Max. ripple	≤ 10 %
Voltage drop	2,4 V
Max. load current	200 mA

No load current	≤ 10 mA
Leakage current	≤ 10 µA
Switching frequency	15 Hz
Switching hysteresis	≤ 15 %
Operating temperature	-25 ° C to 70 ° C
Temperature drift	≤ 10 %
Repeat accuracy	≤ 10 %
Switching state	LED
Time delay	500 ms
Short-circuit proof	yes
Overload protection	yes
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-2:2008
Housing material	Brass, nickel plated
Material active face	PCB
Cable length	2 m
Utilisation category	DC 13
Cable material	PVC LIYY grau (grey)
Nominal operating voltage	24 V DC
Cable cross	3x0.34 mm ²
FIT / MTTF acc. to SIEMENS 29500	144,25 / 791y

Errors and omissions excepted