



Power Supply EG III - 130 Series 130 - Relay Output



- To connect three 2, 3 or 4-wire sensors with NPN or PNP transistor output. When connecting an antivalent sensor (4-wire) the NO or NC output can be connected
- With three output relays

Certificate:



Technical data

Operating voltage (U_B)	115 / 230 V AC $\pm$ 15 % 40 ... 60 Hz
No-load current (I_o)	Typ. 40 mA
Output function	3 x potential-free change-over contact
Contact rating each relay max.	250 V AC / 6 A
Type	EGIII-130
Art.-No.	NA 0002
Actuating current max. (I_S)	100 mA
Residual ripple acc. to DIN 41 755 max.	2 %
Actuating signal	PNP or NPN
Permitted ambient temperature	-25...+70 °C
Display	LED green and yellow
Degree of protection IEC 60529	Housing: IP 30 Connections: IP 20
Norm	EN 60 947-5-2
Connection	Screw terminals

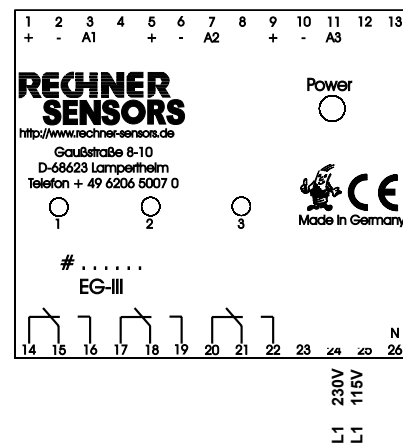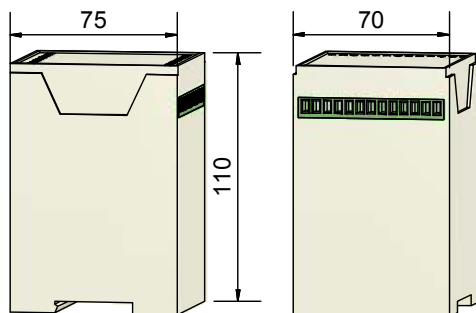

Made in Germany

All specifications are subject to change without notice. (09/2011)