



Capacitive Sensor Series 80 - PNP



Housing M 18 x 1

- Capacitive sensor for level and position control
- Housing material: PA / PPO
- Sensing distance 1...10 mm adjustable



Technical data	Non-flush mountable
Operating distance S_n	8 mm
Operating distance min. / max. adjustable	1...10 mm
Electrical version	3-pin DC
Output	Normally open
Type PNP	KAS-80-A23-S-M18-PPO-Y7C-1-NL
Art.-No.	KA 1398
Operating voltage (U_B)	12...30 V DC
Voltage drop max. (U_d)	≤ 2.0 V
Permitted residual ripple max.	5 %
Operating current (I_e)	0...200 mA
No-load current (I_o)	< 15 mA
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67*
Norm	EN 60947-5-2
Flexible connection	M8 connector, 0.6 m, PVC 3 x 0.34 mm ²
Housing material	PA / PPO
Active surface	PA / PPO
Lid	PA / PPO
Accessories (delivered with the sensor)	2 nuts M 18 x 1
Matching connectors (not delivered with the sensor)	#193210, #193230

All specifications are subject to change without notice. (18.02.2020)

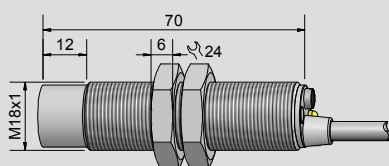

* With sealed potentiometer screw

Made in Germany