




Capacitive Sensors Series 95 - AC / DC - Relay Output

Housing M 32 x 1.5

- Housing material: PBT
- Sensing distance 2...25 mm adjustable
- Normally open and normally closed function
- Potential-free change-over contact
- Switch-on and switch-off delay changeable
- Adjustable timer 1 sec. - 10 min.



Technical data	Non-flush mountable
Level sensor, in contact with the product	Medium dependent adjustable
Operating distance min. / max. adjustable	2...25 mm
Electrical version	5-wire AC / DC
Output function	Relay, 1 CO
Type	KAS-95-35-1CO-M32-PBT-TD-Z02-1-HP
Art.-No.	KA 0822
Operating voltage (U _B)	20...250 V AC / DC
Load max. AC (I, U, P)	2 A, 250 V, 60 VA
Load max. DC (I, U, P)	2 A, 220 V, 60 W
No-load current (I _o)	2.1 mA
Frequency of operating cycles max.	2 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67*
Norm	EN 60947-5-2
Connection cable	2 m, PVC, 5 x 0.34 mm ²
Housing material	PBT
Active surface	PBT
Lid	PBT
Accessories (supplied with the sensor):	2 nuts M 32 x 1,5
Accessories (not supplied with the sensor): Control tube (#190710) and sensor holder (#190711) please see our selection of accessories.	

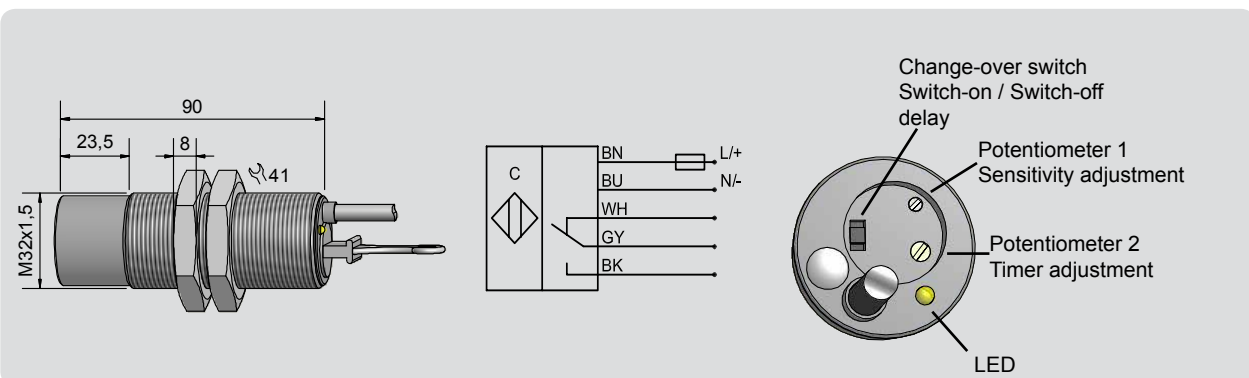

*With sealed potentiometers

Made in Germany

All specifications are subject to change without notice. (06.02.2020)