



Capacitive Sensors S26 Series 80 - PNP

Type of construction G 1"

- Housing material: PTFE
- Useable for an ambient temperature up to +100 °C
- With flange connector M 12 x 1





Technical data	Non-flush mountable
Level sensor, in contact with the product	Medium dependent adjustable
Operating distance min. / max. adjustable	0...20 mm
Electrical version	4-pin DC
Output function	Antivalent
Type PNP	KAS-80-26/113-A-G1-PTFE-100C-Y5-1-HP
Art.-No.	KA 0688
Operating voltage (U _B)	10...35 V DC
Voltage drop max. (U _d)	≤ 2.0 V
Permitted residual ripple max.	10 %
Operating current (I _e)	2 x 0...200 mA
No-load current (I _o)	Typ. 15 mA
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-25...+100 °C / CIP 121 °C (zero-current)
LED-display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67*
Norm	EN 60947-5-2
Connection	Flange connector M 12 x 1
Housing material	PTFE (FDA 21 CFR 177.1550)
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PA
Media optimized	Yes

Capacitive Sensors S26 with hemispherical active surface for level control of products with a dielectric constant ϵ_r as of 1,1. Products can be:

- Bulk material, like plastic granules, powder, cereals, etc.
- Liquids, like water, juice, wine, oil, chemicals or pharmaceutical solutions and much more.
- Pastes in the food processing industry, liquid glue, resins or glue, etc.

Accessories (not delivered with the sensor): For varivent adapter, triclamp adapter, welding socket and matching connectors please see our selection of accessories.

* With sealed potentiometer screw

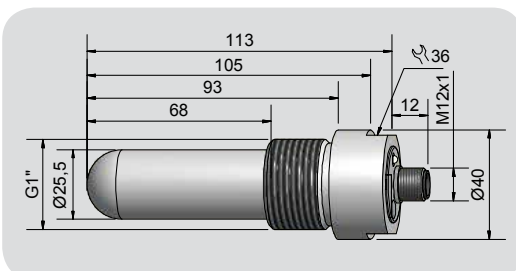

Made in Germany

All specifications are subject to change without notice. (01/2018)