

MS-I12-T8


MS - Expansion unit

- 12 digital inputs
- 8 test outputs for sensor monitoring
- Connection to MS-1 master via MS-SC proprietary bus
- MS-SC connector included



Safety instructions

All the installation, connection and safety regulations, as per our technical information, have to be strictly adhered to. The set-up of the products have to be made by skilled staff, only. Repair exclusively made by di-soric.

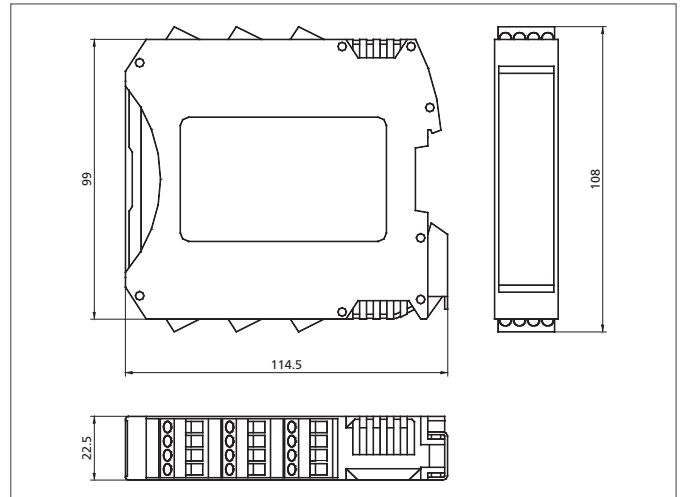

TECHNICAL INFORMATION (typ.)		+20°C, 24 V DC
Characteristic parameters		SIL 3 (IEC 61508), SILCL 3 (IEC 62061), PL e - Cat. 4 (EN ISO 13849-1)
Mounting		rail fastening according to EN 50022-35 standard
Operating principle		Input expansion unit
Size		99 x 22.5 x 114.5 mm (Dimensions)
Safety inputs		12
Service voltage		19,2 ... 28,8 V DC
Test outputs		8
Display		LED for input / output status and failure diagnosis
Ambient temperature, operation		-10 ... +55 °C
Protection class		IP 20, (housing), IP 2X, (terminal blocks)
Casing material		polyamide (with locking latch mounting made of metal)
Connection		removable terminal blocks, screw contacts
Communication		5-way high-speed bus 5.0
Scope of delivery		multi-language installation sheet, MS - Connector MS-SC