




## I/O-junction passive, M12, Top



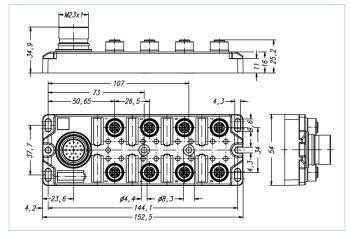







Item description	8I/OM12-5P3T
Item-No.	8045647
Customs tariff-No.	85366990
Step-File	8IOM12-5P3Tstp
EAN	4047106004385
Technical data	
I/O-junction	8-way, with connecting plug, M23
I/O-slot	female, M12
Number of pins	4+PE
Coding	A
Rated voltage	30V
Current load (at 40°C)	2A
Total current load	12A
Insulation resistance	≥10 <sup>8</sup> Ω
Resistance	≤ 5mΩ
Ambient temperature product	-30°C+90°C
Number of LEDs	17
Number of I/O-slots	8
Circuit logic	pnp
Signal status-indicator	LED YE
Operating voltage-indicator	LED GN
Contact material	Metal, CuZn, gold-plated
Contact-carrier material	Plastic, PA, BK
Sealing (female) material	FPM/FKM
Housing material	Plastic, PA, BK
Connecting type	Тор



Thread insert material	Metal, CuZn
Standards	IEC 61076-2-101
Degree of protection (mounted)	IP65, IP67
Mechanical life-cycle	>100 mating cycles
Connecting plug	M23x1, 19 poles
Sealing material, connecting-plug	Plastic, FPM/FKM
Receptacle housing material, conecting-plug	Metal, CuZn, nickel-plated
Contact material, connecting-plug	Metal, CuZn, gold-plated
Contact-carrier material, connecting-plug	Plastic, PA, BK
Mechanical life-cycle, connecting-plug	>100 mating cycles
Number of pins, connecting-plug	19
Degree of protection, connecting-plug (mounted)	IP65, IP67
Degree of pollution	3

Allocation chart																			
I/O		1	2		3		4		5		6		7		8		all (+)	all (-)	all (FE)
Pin	2	4	2	4	2	4	2	4	2	4	2	4	2	4	2	4	1	3	5
M23	7	15	4	5	8	16	14	3	9	17	13	2	10	11	18	1	19	6	12
Cable (19.003) Accessories	GYPK	WH	RDBU	GN	WHGN	ΥE	BNGN	GY	WHYE	PK	YEBN	RD	WHGY	BK	GYBN	4	BN	BU	GNYE

Classification	
eCl@ss 6.0	27279219
eCl@ss 7.0	27279219
eCl@ss 8.0	27279219
eCl@ss 9.0	27440108
ETIM 5.0	EC002585
ETIM 6.0	EC002585

## Accessories

Screw plug, M12 https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8000004/Screw-plug-M12-female-black

Labels, I/O-junction passive, I/O-junction logic

https://www.escha.net/en/Products/Standard/Accessories-for-connectivity/8015002/Labels-M12-I/O-junctions

 $Single-ended\ cordset,\ M23\\ https://www.escha.net/en/Products/Standard/SensorActuator-connectors/8017221/M23-female-straight-19-poles$ 

Single-ended cordset, M23

https://www.escha.net/en/Products/Standard/SensorActuator-connectors/8017111/M23-female-angled-19-poles

Field-wireable connector, M23, Soldering contact

https://www.escha.net/en/Products/Standard/Field-wireable-connectors/8013696/M23-female-straight-field-wireable-19-poles-soldering-contact-125V and a contact-125V and a contact-125V

 $Field-wire able connector\ ,\ M23,\ Soldering\ contact\\ https://www.escha.net/en/Products/Standard/Field-wireable-connectors/8017151/M23-female-angled-field-wireable-19-poles-soldering-contact-125V$