



Capacitive Sensors Series Leak - ATEX

Housing Ø 50 mm

- For use in areas with the risk of gas explosion, zone 0
- Leakage control in clean room / Alarm for containers and pipelines. Mounting in „drip trays“ of plastic, glass or metal
- Housing material: PTFE
- Semiconductor Industry, Chemical Industry

DMT 03 ATEX E 048

IECEX BVS 07.0031


Ex II 1G Ex ia IIC T1-T6 Ga

Ex ia IIC T1-T6 Ga



Technical data	Flush mountable
Operating distance S_n	4.5 mm
Electrical version	2-wire DC
Output function	NAMUR DIN 60947-5-6
Type current	KAS-40-39/23-N-D50-PTFE-Z02-1-Leak-1G
Type	KAS-40-LEAK-D50-PTFE-N
Art.-No.	KA 9037
Operating voltage (U_B)	5 - 15 V DC, $U_i = 15$ V DC
Output current active surface free	< typ. 1.5 mA
Output current active surface covered	> typ. 2.5 mA
Self-inductance (L)	0.2 mH
Self-capacitance (C)	250 nF
Permitted residual ripple max.	10 %
Permitted ambient temperature	Clean room conditions
LED-display	Red
Degree of protection IEC 529	IP 67*
Connection cable	2 m, FEP, screened, 2 x 0.14 mm
Housing material	PTFE (FDA 21 CFR 177.1550)
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PTFE (FDA 21 CFR 177.1550)

All specifications are subject to change without notice. (06.01.2020)

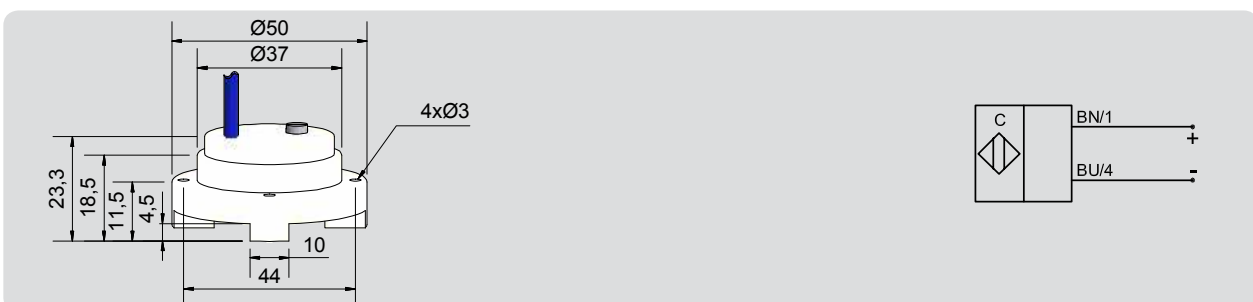

* With sealed potentiometer screw