



Capacitive Sensor Series 80 - PNP



Housing M 30 x 1.5

- Capacitive sensor for level and position control
- Housing material: Brass
- Sensing distance 2...20 mm adjustable



Technical data	Flush mountable
Operating distance S_n	10 mm
Operating distance min. / max. adjustable	2...20 mm
Electrical version	3-wire DC
Output function	Normally open
Type PNP	KAS-80-A14-S-M30-PTFE/MS-Z02-1
Art.-No.	KA 0904
Operating voltage (U_B)	12...30 V DC
Voltage drop max. (U_d)	≤ 2.0 V
Permitted residual ripple max.	5 %
Operating current (I_e)	0...200 mA
No-load current (I_o)	Typ. 15 mA
Frequency of operating cycles max.	150 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Yellow
Protective circuit	Built-in
Degree of protection IEC 529	IP 67*
Norm	EN 60947-5-2
Connection cable	2 m, PVC, 3 x 0.75 mm ²
Housing material	Brass
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PA / PPO
Accessories (delivered with the sensor)	2 nuts M 30 x 1.5

All specifications are subject to change without notice. (18.02.2020)

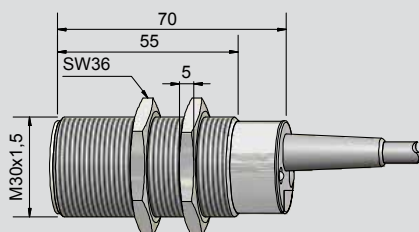

* With sealed potentiometer screw

Made in Germany